
SLIP LOCK PANEL SYSTEM - SLP - 100 SERIES

SPECIFICATIONS

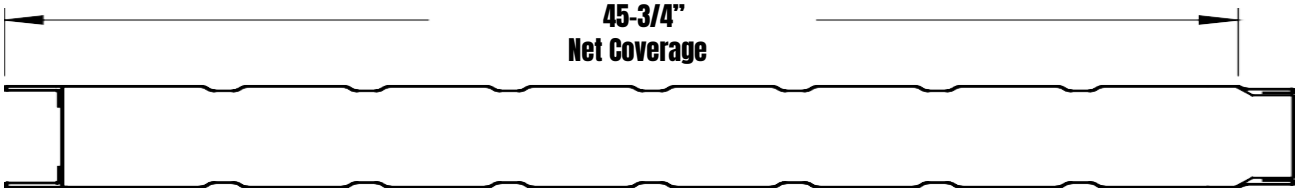

DESCRIPTION
A versatile insulated building panel with a tongue and groove joining system roll-formed along the edge to meet all your needs.

RECOMMENDED USES
Agricultural, Cold-rooms, Freezers, Clean-rooms, Caravan Annexes, Roofs, Partitioning, Portable Buildings.

Width: 45-3/4"

Length: To Order

Skin: 26 Gauge G-90 hot dipped galvanized (ASTM 446) with a baked on anti- microbial white epoxy paint.

Core Material: Expanded Polystyrene (EPS) with a minimum density of 1.0 lb. per cubic foot, compliant with ASTM C578 standards, and CFC-free. Fire retardant additives are included for enhanced safety.

Thermal Properties: At a mean temperature of 25° F, EPS offers an R-value of 4.35 per inch. At a mean temperature of 40°F, the R-value is 4.17 per inch

Weight: 2"- 1.99, 3"- 2.05, 4"- 2.15, 5"- 2.24, 6"- 2.37, 7"- 2.40, 8"- 2.49, 9"- 2.57, 10"- 2.65, 11"- 2.73, 12"- 2.81.

Adhesive: Polyurethane, CFC-free.

Flammability Properties of SLP 100 Panels:


ASTM E84-95 Flame Spread Index = 5
ASTM E84-95 Smoke Development Index = 80 (Based on 4" thickness)
ASTM E84-95 Ignition and Self-Ignition temperature 610°F and 850°F respectively.

Span Chart: Available Per Request.

Variations: Contact Us.


UPI PANELS

UPI PANELS

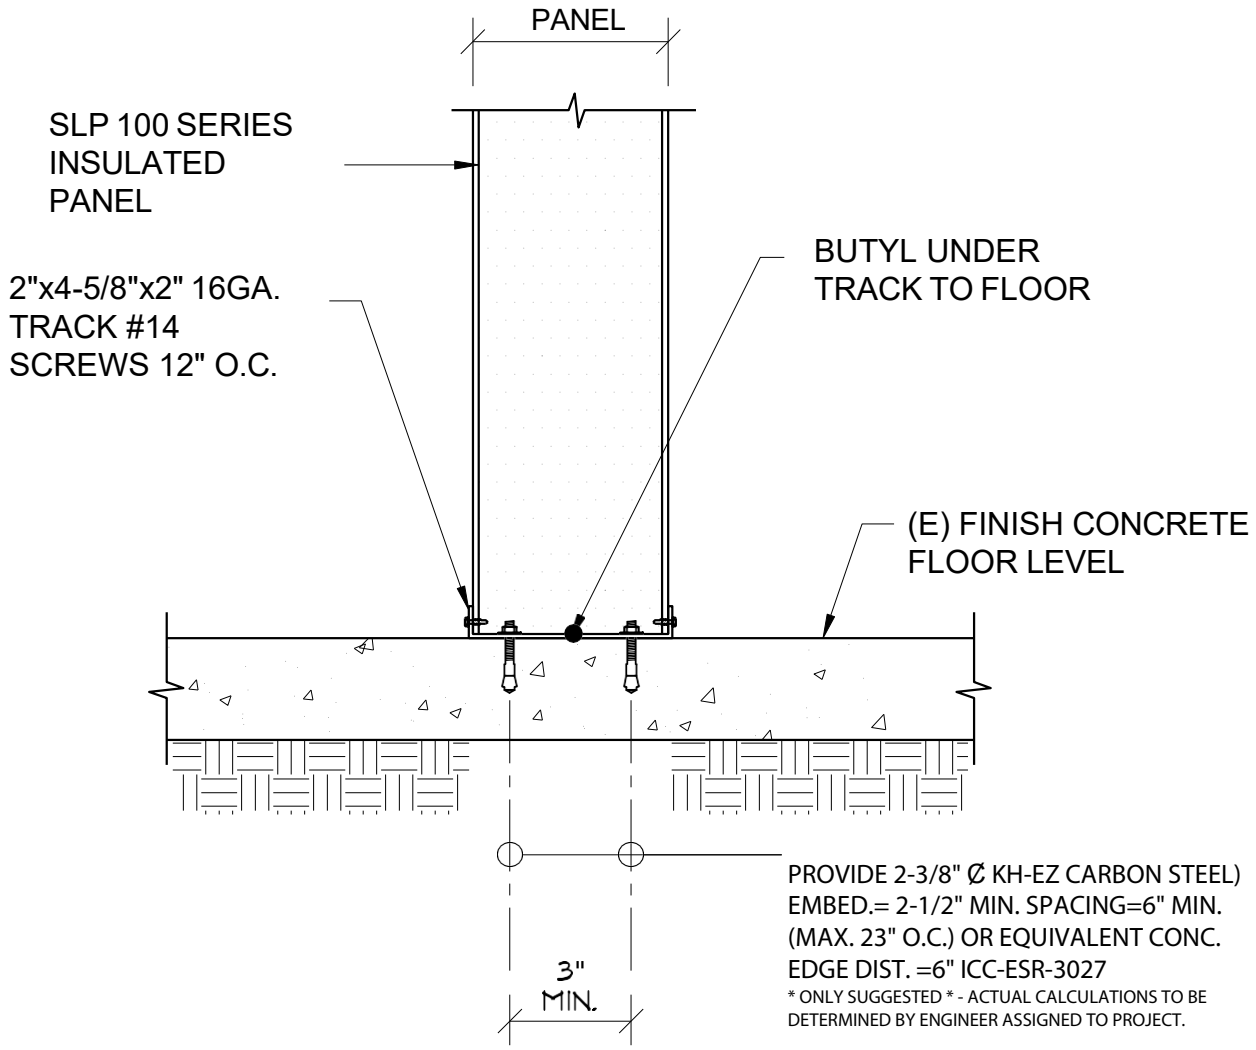


WALL TO SLAB


UPI PANELS

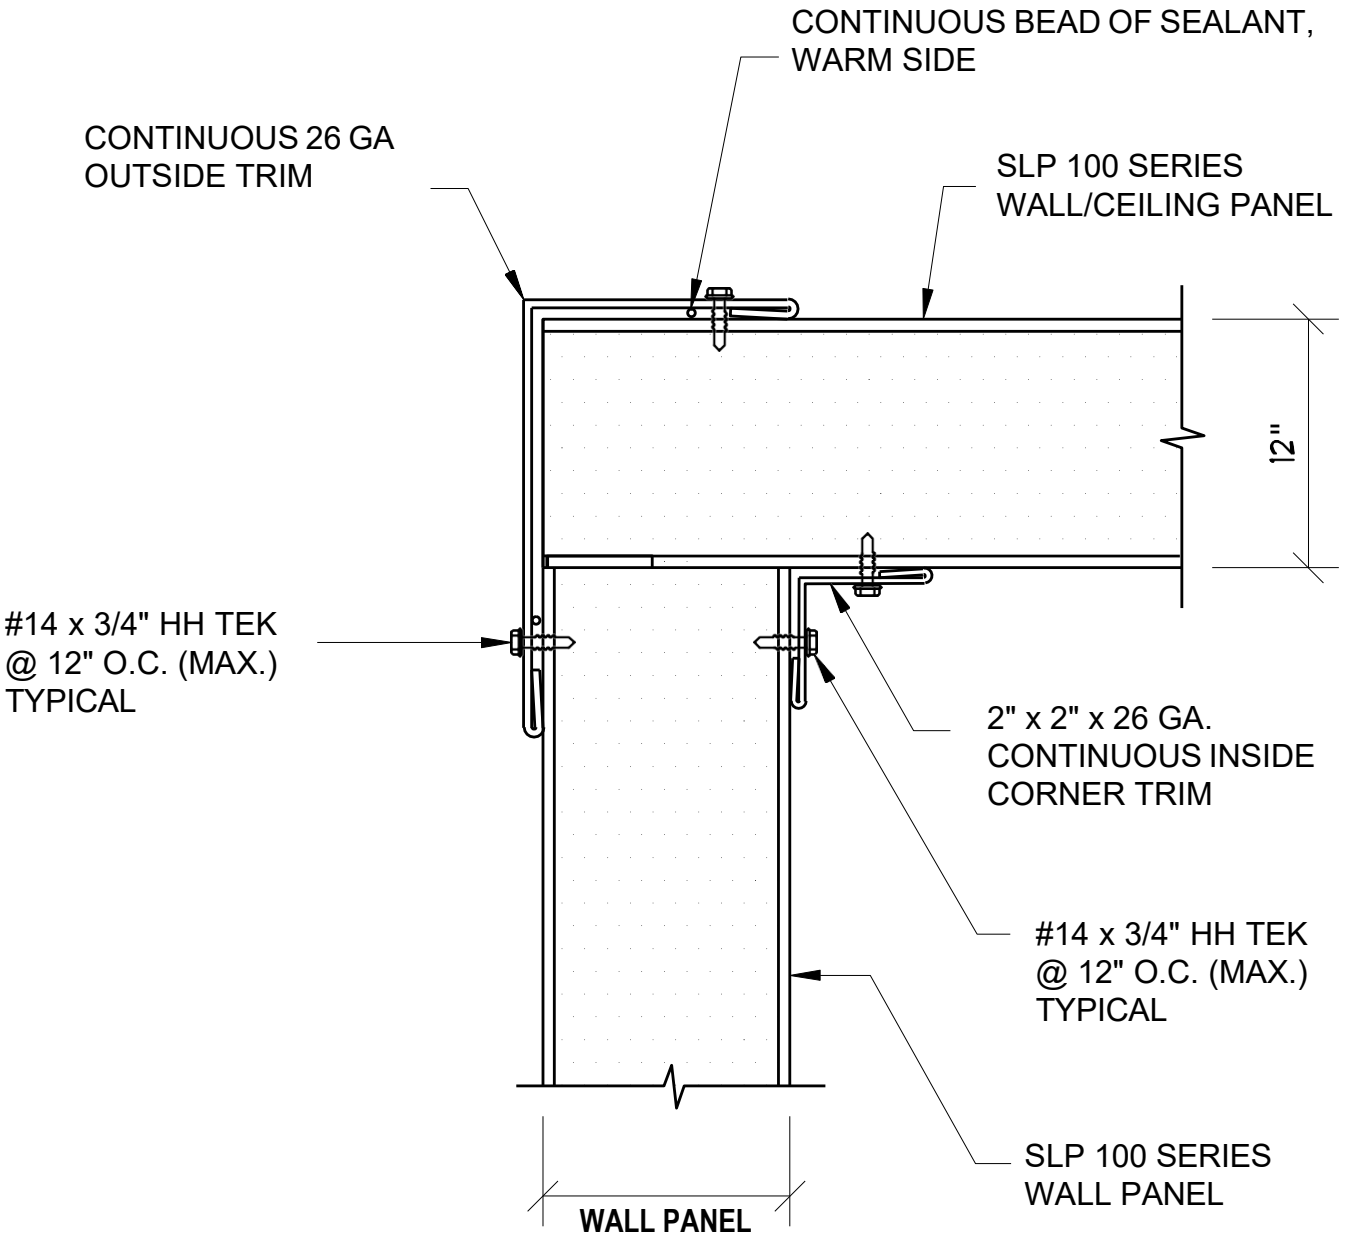

WALL TO CEILING CORNER DETAIL


PANELS

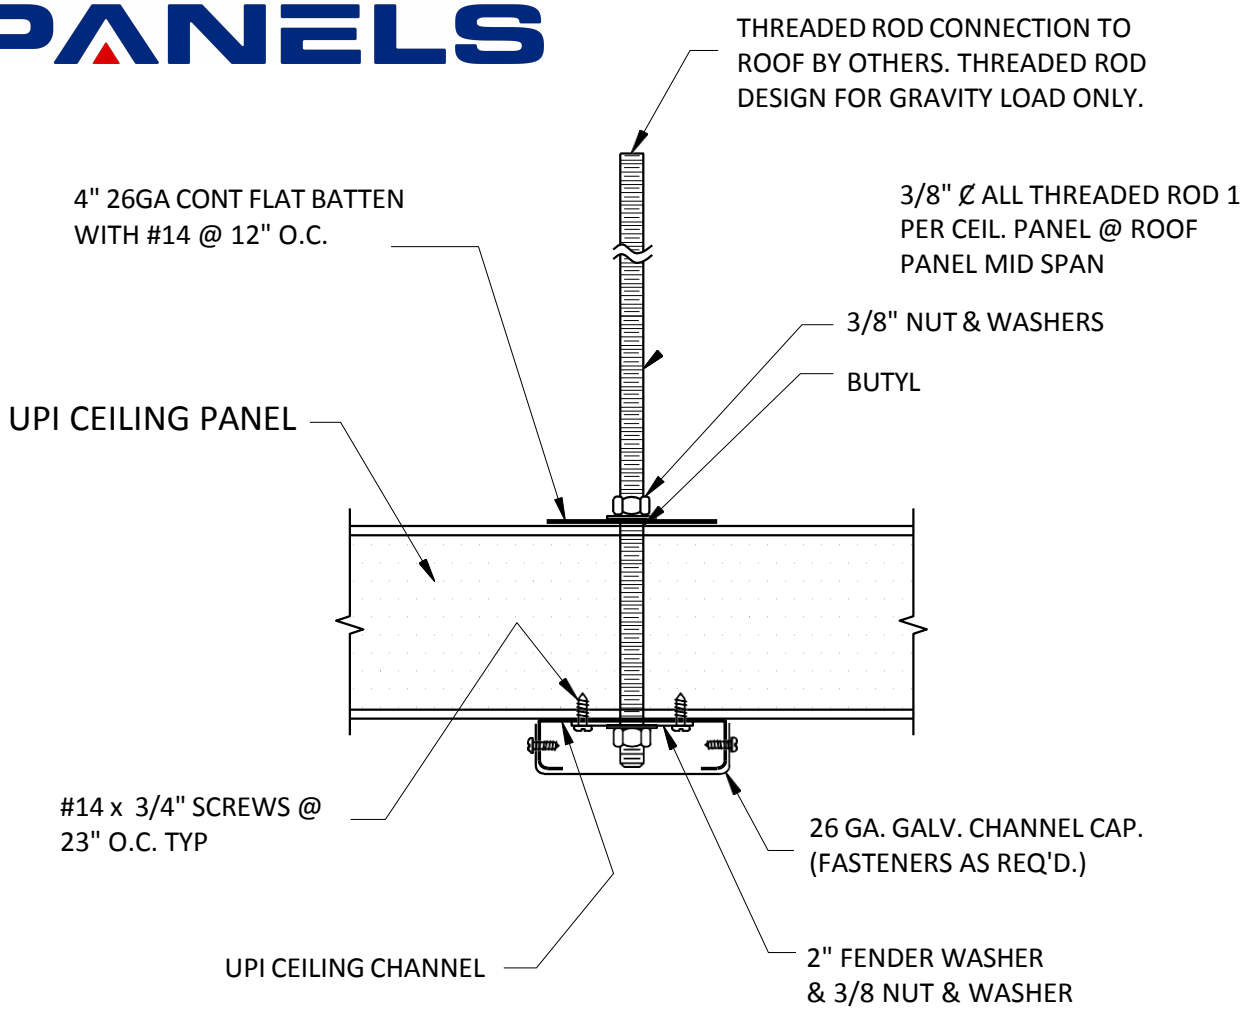

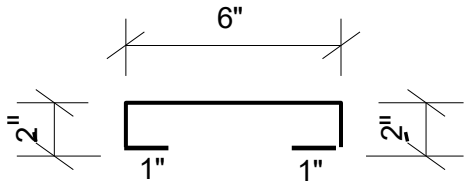


UPI 14 GA. CEILING CHANNEL

SUSPENDED CEILING

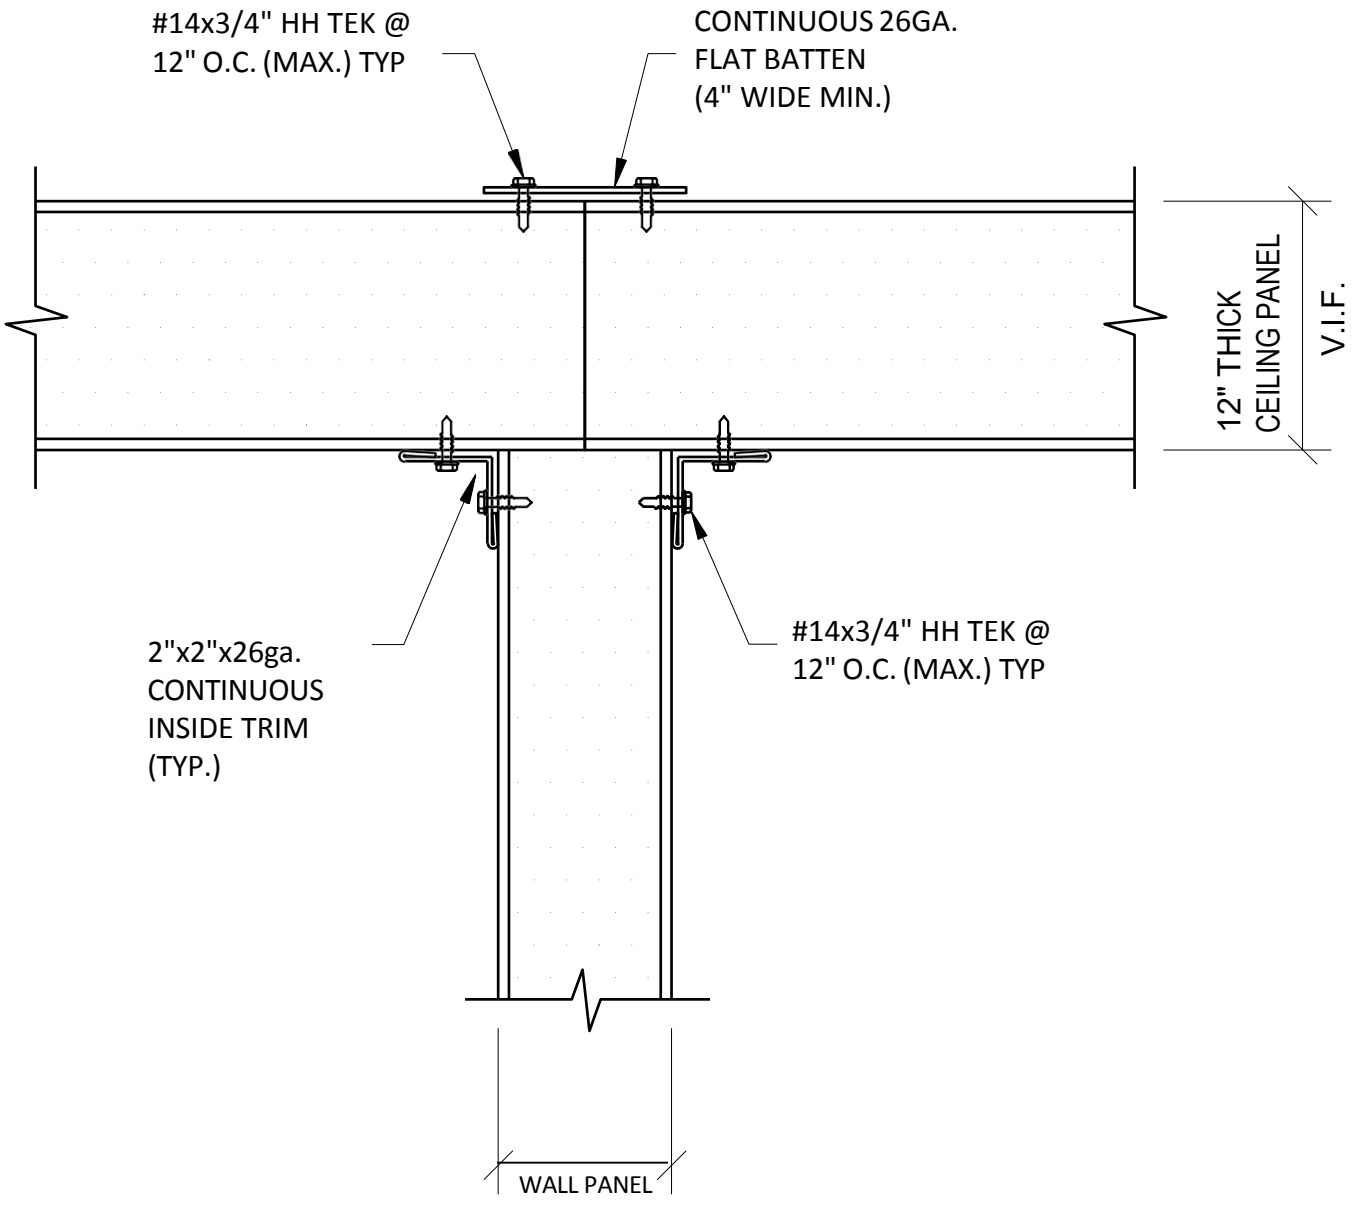


CEILING PANEL TO CEILING PANEL

UPI PANELS

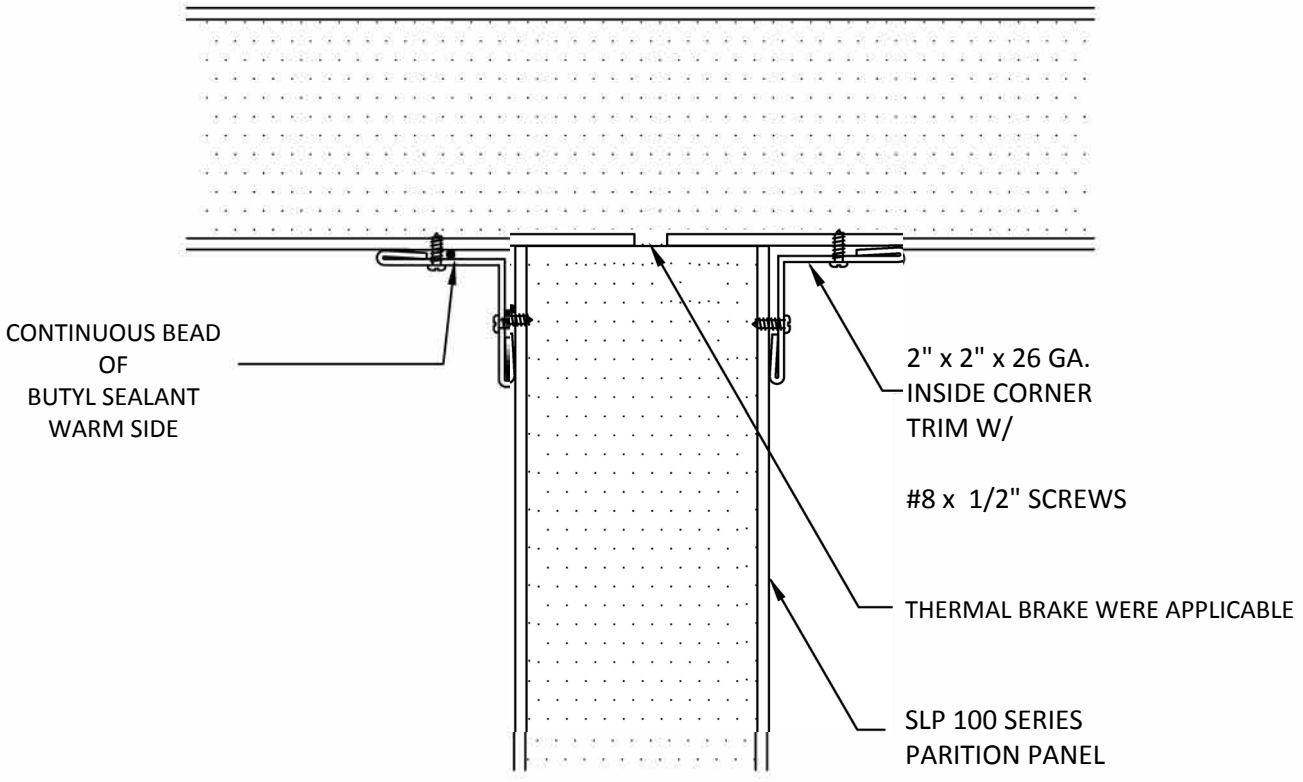

PARTITION WALL DETAIL

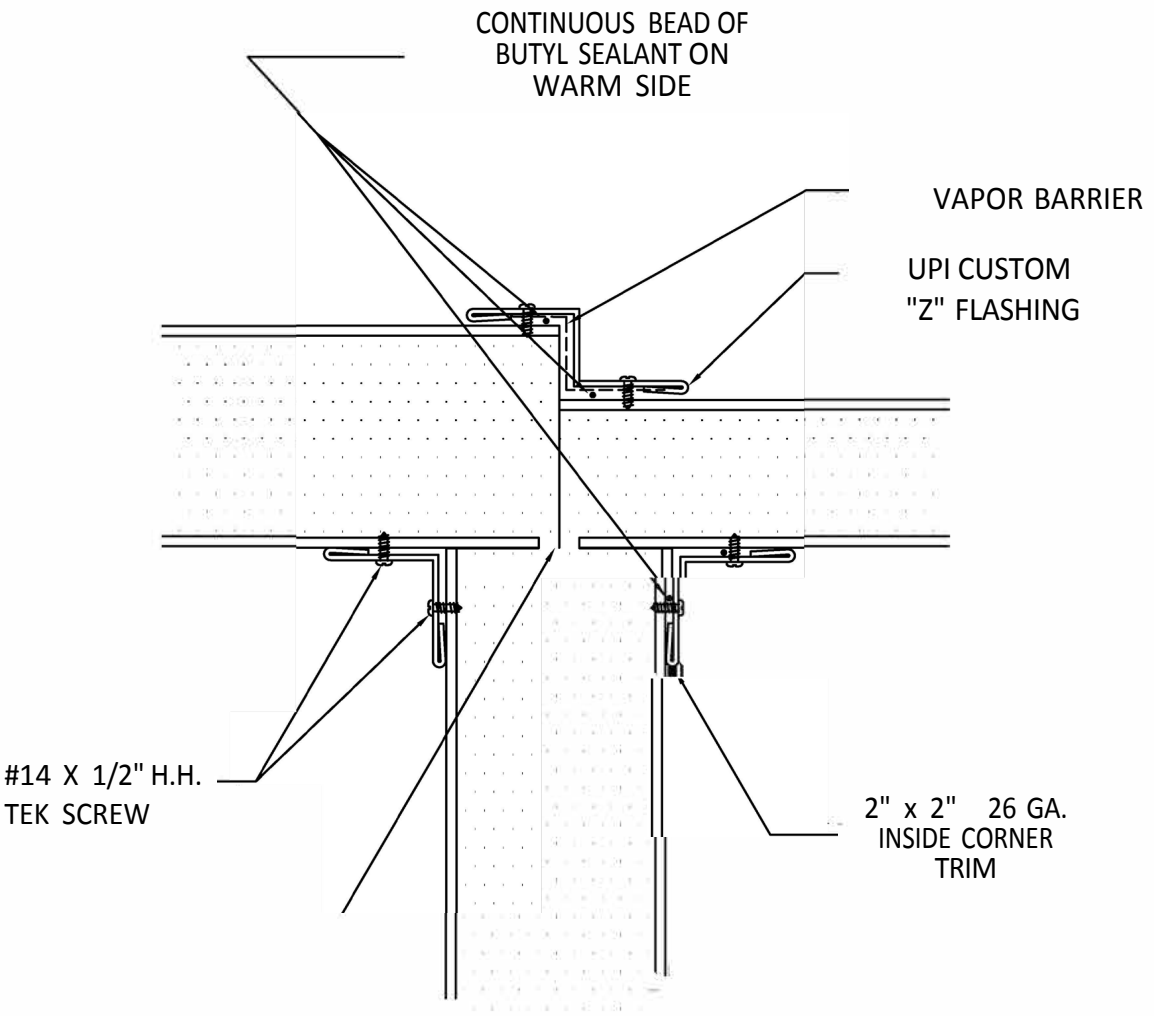

CHANGE IN THICKNESS DETAIL

WARRANTY AND LIMITATION OF LIABILITY

UPI PANELS, WARRANTS THAT THE INSULATING PANELS AND LINERS IT SUPPLIES HEREUNDER SHALL CONFORM TO THE DESCRIPTION STATED HEREIN AND SHALL NOT PEEL, DELAMINATE OR OTHERWISE DETERIORATE SO AS TO RENDER THEM UNSUITABLE FOR USE IN THE APPLICATION FOR WHICH ORIGINALLY SOLD FOR A LIFETIME WARRANTY FROM DATE OF SHIPMENT BY UNITED PANEL INDUSTRIES, PROVIDED. HOWEVER, SHALL NOT BE LIABLE FOR FAILURES DUE IN WHOLE OR IN PART TO ANY ACT OF GOD, FIRE OR OTHER CASUALTIES, ABUSE OR ABNORMAL USE, OR OTHER SIMILAR CAUSES: AND PROVIDED FURTHER, THAT SUCH PANELS AND LINERS ARE USED IN A BUILDING APPLICATION OF ADEQUATE DESIGN, ENGINEERING, AND CONSTRUCTION, AND CURRENT DESIGN AND INSTALLATION RECOMMENDATIONS ARE FOLLOWED.

THE ABOVE WARRANTY IS IN LIEU OF ALL OTHER WARRANTIES EXPRESS OR IMPLIED, INCLUDING ANY IMPLIED WARRANTY OF MERCHANT ABILITY OR FITNESS FOR A PARTICULAR PURPOSE.

IT IS EXPRESSLY UNDERSTOOD THAT UPI PANELS, LIABILITY AND PURCHASER'S EXCLUSIVE REMEDY HEREUNDER FOR ANY CAUSE WHATSOEVER, INCLUDING ALLEGED NEGLIGENCE, IS LIMITED TO REPAIR OR REPLACEMENT OF NON CONFORMING GOODS.

IN NO EVENT SHALL UPI PANELS, BE LIABLE FOR SPECIAL, INDIRECT, CONSEQUENTIAL OR INCIDENTAL DAMAGES.

PURCHASER SHALL INSPECT THE GOODS FURNISHED HEREUNDER IMMEDIATELY AFTER DELIVERY. PURCHASER'S FAILURE TO GIVE NOTICE OF ANY CLAIM WITHIN (30) DAYS FROM DATE OF DELIVERY SHALL CONSTITUTE AN UNQUALIFIED ACCEPTANCE OF SUCH GOODS.

THANK YOU,

Pat McGuire

UPI PANELS