
GrowPros SOLUTIONS

COMMERCIAL SOLUTIONS DESIGNED SPECIFICALLY FOR INDOOR CANNABIS CULTIVATION

CHAMELEON 4X6

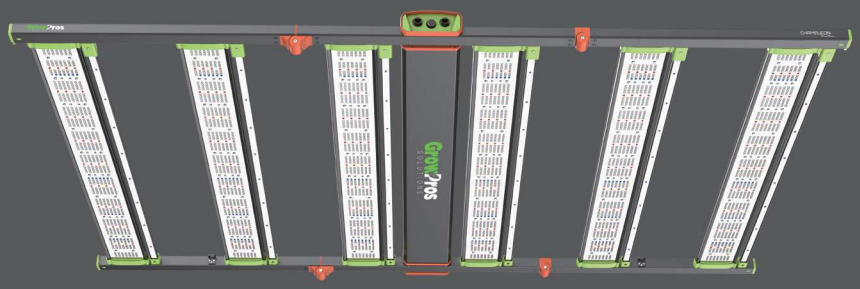

Intertek FOR DAMP LOCATION DLC LISTED QUAD CHANNELS

Model/Rebate/DLC

GPS-UWRI1500-46
GPS-UWRI1250-46
GPS-UWRI1000-46

Our Chameleon Series represent the ideal LED grow lights designed for vertical growers. These lights feature a sleek, flat body with a high photon conversion rate and low heat emission, making them perfectly compatible with popular two-tier or three layer grow racks from Pippe, Grow Pros Solutions, Montel, and more.

INTEDENDED APPLICATIONS


- Hydroponic Cannabis Growing
- Indoor Greenhouse

RECOMMEDED SET-UP

- **FLOWER:** 4' X 6' Area; 12"-24" from top of canopy
- **VEG:** 5' X 7' Area

FEATURES & BENEFITS

- 4 adjustable channels for customizable spectrum.
- Replaceable UV bars.
- Extra wide bars with algorithmic diode placement for even PPFD.
- Designed for large scale commercial craft growing.
- 4' x 6' canopy light spread for 4' or 5' wide bench or tents.
- Designed for Spectrum crop steering-give your plants the best combinations of light throughout the day and each stage of growth and flowering cycles.
- Compatible with all sizes of Chameleon.

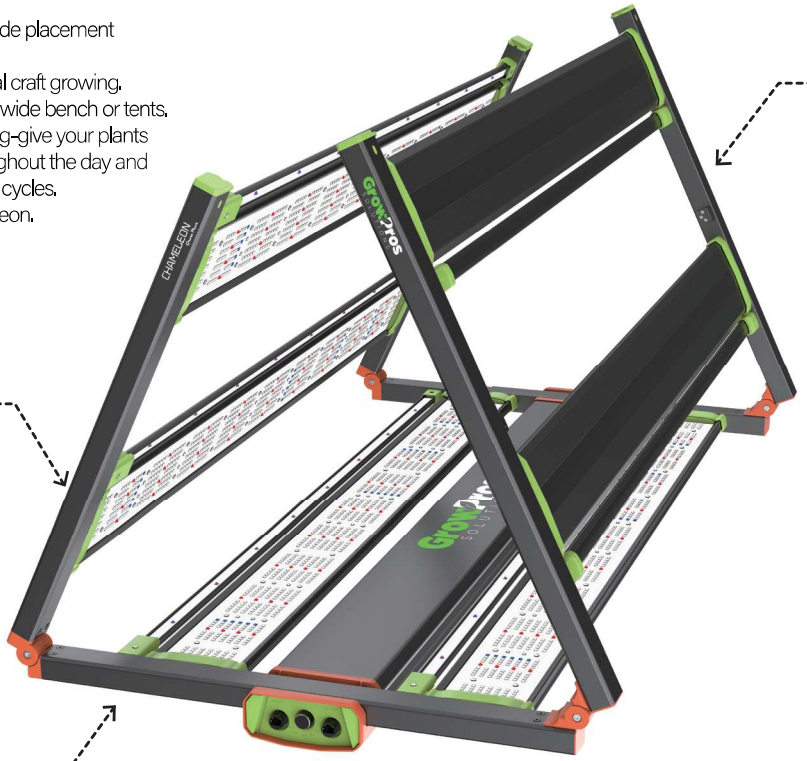

ULTRA THIN
Designed to maximize vertical growing space in multi-tier vertical grow set ups.

Commercial grow in mind supporting 208-277V power

Easy Assembly
Designed for effortless installation with no assembly requried. Ready to use upon unpacking.

CHANNEL 1	UVA - 5.5%
CHANNEL 2	6200K + 437.5nm Blue - 70%
CHANNEL 3	660nm Deep Red - 18%
CHANNEL 4	730nm Far Red - 6.5%

WWW.WEGROWPROS.COM

Address: 5411 Daniels Street, Chino, CA 91710
Tel: (800) 383-6200 | **Email:** info@wegrowpros.com

GrowPros SOLUTIONS

1500W
GPS-UWRI1500-46

COMMERCIAL SOLUTIONS DESIGNED SPECIFICALLY FOR INDOOR CANNABIS CULTIVATION

SPECIFICATIONS	
WATTAGE	1500W
INPUT VOLTAGE	120-277V
CONTROL	0-10V DIMMING
POWER FREQUENCY	50/60Hz
POWER FACTOR	>0.9
THD	⩽20%
THERMAL MANAGEMENT	PASSIVE
WORKING TEMPERATURE	0°F to 113°F
IP RATING	Suitable for dry and damp locations
HEAT LOAD PER FIXTURE	5,115 BTUs

MAXIMUM POWER ELECTRICAL DATA

	120V	240V	277V
AC CURRENT	12.5A	6.25A	5.41A
AC POWER	1495W	1473W	1450W
POWER FACTOR	0.997	0.982	0.967

PPFD READING

12" Height @ 100% (1500W)


4X6

909	991	1115		1142		1142		1154		1120	954	913
			1305			1251			1301			
1031	1416	1537		1685		1658		1692		1548	1443	1168
					1917	1832	1936					
1147	1581	1762	1876	1877	1953	1881	1972	1860	1931	1739	1615	1155
					1876	1808	1902					
1030	1385	1477		1569		1602		1542		1413	1315	986
			1212			1280			1178			
826	944	989		1057		1068		1055		993	929	843

PERFORMANCE DATA	MAX POWER @ 12" H
PPF	4530 µmol/s
PPFD	1972 µmol/m2/s
PPE	3.02 µmol/J

FULL SPECTRUM + IR


Spectrum

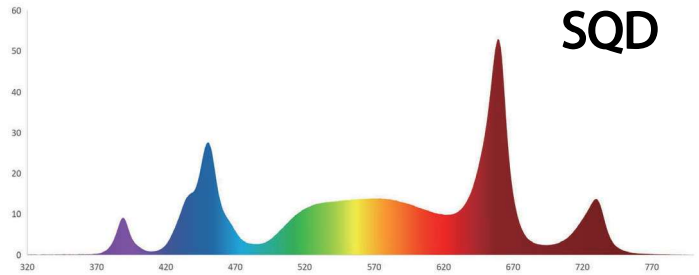

Wavelength (nm)

Quad Channel Spectrum Controls

DIMENSIONS

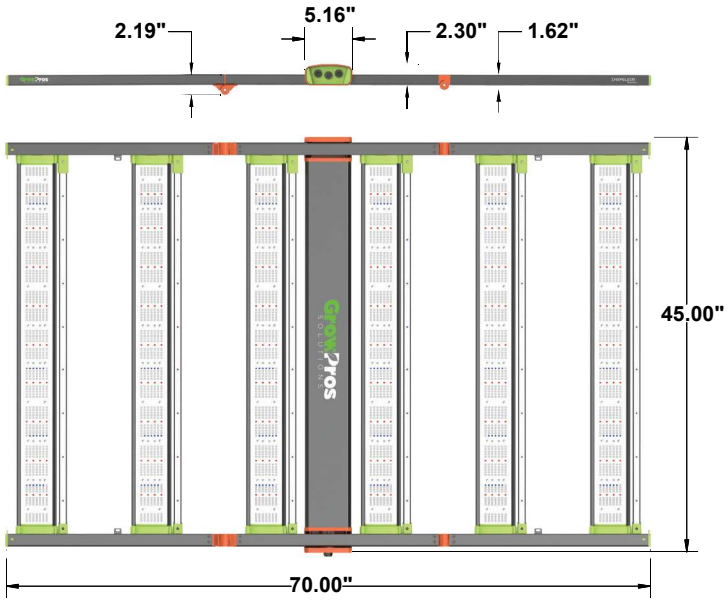

WWW.WEGROWPROS.COM

Address: 5411 Daniels Street, Chino, CA 91710

Tel: (800) 383-6200 | **Email:** info@wegrowpros.com

GrowPros SOLUTIONS

1250W
GPS-UWRI1250-46

COMMERCIAL SOLUTIONS DESIGNED SPECIFICALLY FOR INDOOR CANNABIS CULTIVATION

SPECIFICATIONS	
WATTAGE	1250W
INPUT VOLTAGE	120-277V
CONTROL	0-10V DIMMING
POWER FREQUENCY	50/60Hz
POWER FACTOR	>0.9
THD	⩽20%
THERMAL MANAGEMENT	PASSIVE
WORKING TEMPERATURE	0ºF to 113ºF
IP RATING	Suitable for dry and damp locations
HEAT LOAD PER FIXTURE	4,262.5 BTUs

MAXIMUM POWER ELECTRICAL DATA

	120V	240V	277V
AC CURRENT	10.41A	5.21A	4.51A
AC POWER	1243W	1224W	1200W
POWER FACTOR	0.996	0.979	0.961

PPFD READING

12" Height @ 100% (1250W)


4X6

777	845	949		965		976		976		962	812	774
			1094			1064			1142			
881	1206	1299		1415		1404		1423		1301	1222	986
					1668	1598	1666					
970	1331	1484	1586	1574	1685	1624	1707	1612	1679	1474	1371	991
					1631	1572	1647					
877	1185	1252		1336		1350		1366		1187	1118	840
			882			950			910			
696	800	843		902		917		894		852	798	722

PERFORMANCE DATA	MAX POWER @ 12" H
PPF	3838 µmol/s
PPFD	1707 µmol/m2/s
PPE	3.07 µmol/J

FULL SPECTRUM + IR


Spectrum

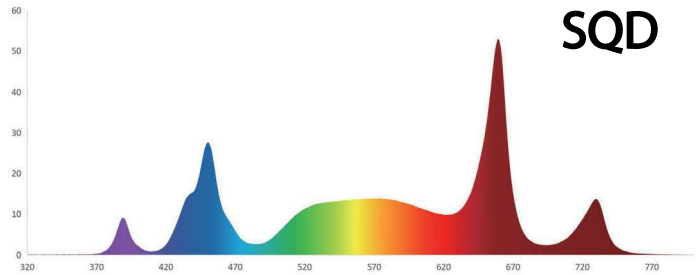

Wavelength (nm)

Quad Channel Spectrum Controls

DIMENSIONS

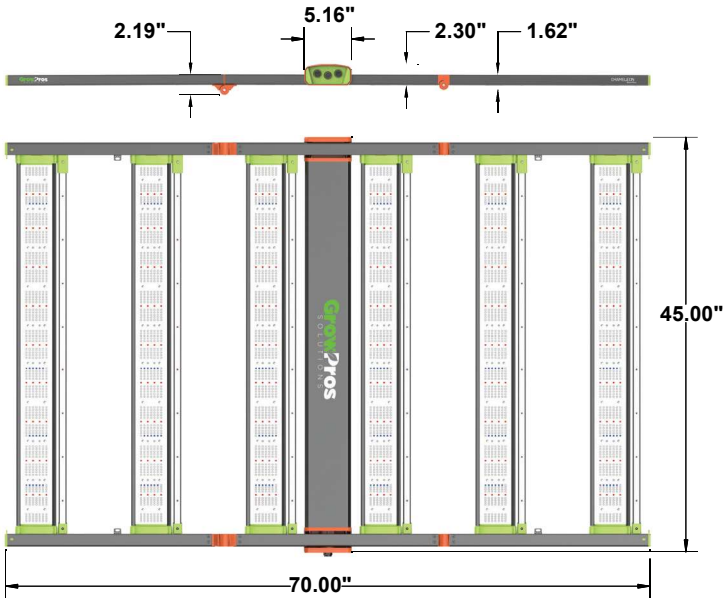

WWW.WEGROWPROS.COM

Address: 5411 Daniels Street, Chino, CA 91710

Tel: (800) 383-6200 | **Email:** info@wegrowpros.com

GrowPros SOLUTIONS

1000W

GPS-UWRI1000-46

COMMERCIAL SOLUTIONS DESIGNED SPECIFICALLY FOR INDOOR CANNABIS CULTIVATION

SPECIFICATIONS	
WATTAGE	1000W
INPUT VOLTAGE	120-277V
CONTROL	0-10V DIMMING
POWER FREQUENCY	50/60Hz
POWER FACTOR	>0.9
THD	⩽20%
THERMAL MANAGEMENT	PASSIVE
WORKING TEMPERATURE	0°F to 113°F
IP RATING	Suitable for dry and damp locations
HEAT LOAD PER FIXTURE	3,410 BTUs

MAXIMUM POWER ELECTRICAL DATA

	120V	240V	277V
AC CURRENT	8.33A	4.16A	3.61A
AC POWER	993W	962W	939W
POWER FACTOR	0.993	0.964	0.939

PPFD READING

12" Height @ 100% (1000W)


4X6

660	693	720		829		829		838		711	689	663
			948			908			945			
749	964	1028		1094		1204		1177		1055	1023	788
					1248	1330	1294					
833	1126	1147	1190	1264	1280	1366	1301	1301	1402	1194	1122	839
					1240	1324	1246					
748	959	1009		1102		1174		1103		984	950	716
			880			930			855			
618	645	688		768		776		766		675	657	612

PERFORMANCE DATA	MAX POWER @ 12" H
PPF	3080 µmol/s
PPFD	1366 µmol/m2/s
PPE	3.08 µmol/J

FULL SPECTRUM + IR


Spectrum

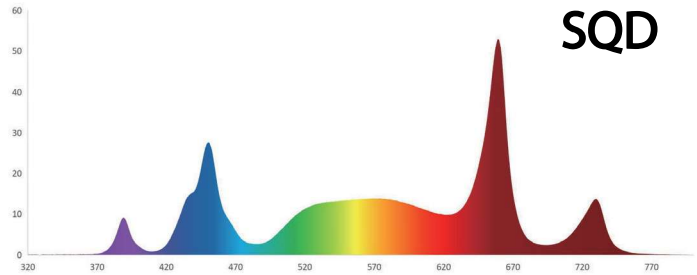

Wavelength (nm)

Quad Channel Spectrum Controls

DIMENSIONS

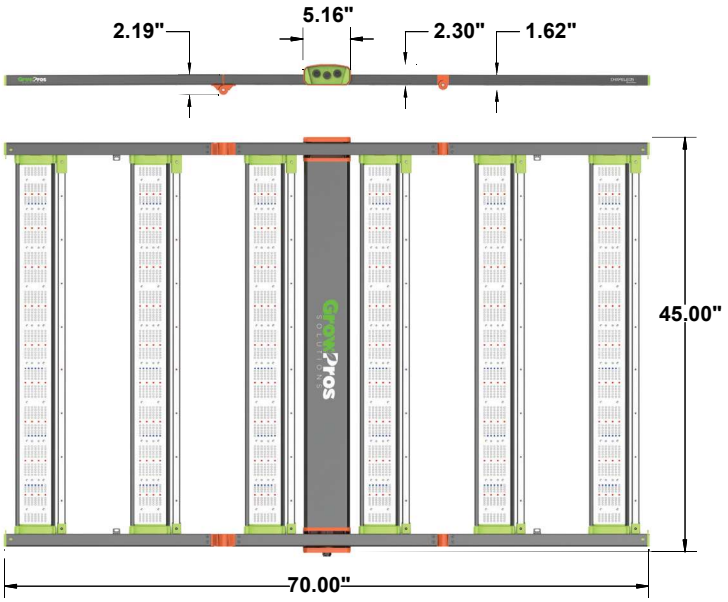

WWW.WEGROWPROS.COM

Address: 5411 Daniels Street, Chino, CA 91710

Tel: (800) 383-6200 | **Email:** info@wegrowpros.com