
Grow Pros SOLUTIONS

COMMERCIAL SOLUTIONS DESIGNED SPECIFICALLY FOR INDOOR CANNABIS CULTIVATION

CHAMELEON 5X5

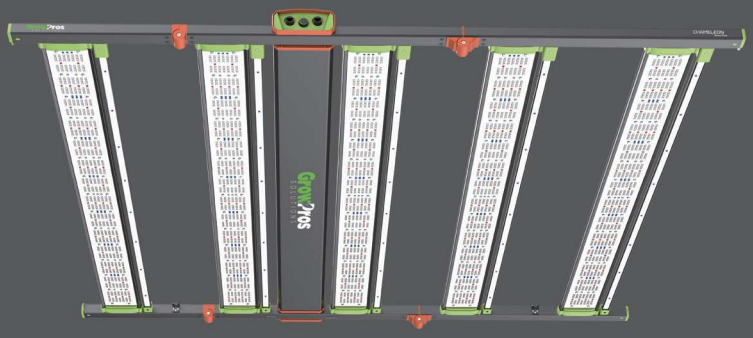

Intertek FOR DAMP LOCATION DLC LISTED QUAD CHANNELS

Model/Rebate/DLC

GPS-UWRI1500-55
GPS-UWRI1250-55
GPS-UWRI1000-55

Our Chameleon Series represent the ideal LED grow lights designed for vertical growers. These lights feature a sleek, flat body with a high photon conversion rate and low heat emission, making them perfectly compatible with popular two-tier or three layer grow racks from Pippe, Grow Pros Solutions, Montel, and more.

INTEDENDED APPLICATIONS

- Hydroponic Cannabis Growing
- Indoor Greenhouse


RECOMMEDED SET-UP

- **FLOWER:** 4' X 6' Area; 12"-24" from top of canopy
- **VEG:** 5' X 7' Area

FEATURES & BENEFITS

- 4 adjustable channels for customizable spectrum.
- Replaceable UV bars.
- Extra wide bars with algorithmic diode placement for even PPFD.
- Designed for large scale commercial craft growing.
- Extra wide 5' x 5' canopy light spread for 5' wide bench or tents.
- Designed for Spectrum crop steering-give your plants the best combinations of light throughout the day and
- each stage of growth and flowering cycles. Compatible with all sizes of Chameleon.

ULTRA THIN
Designed to maximize vertical growing space in multi-tier vertical grow set ups.

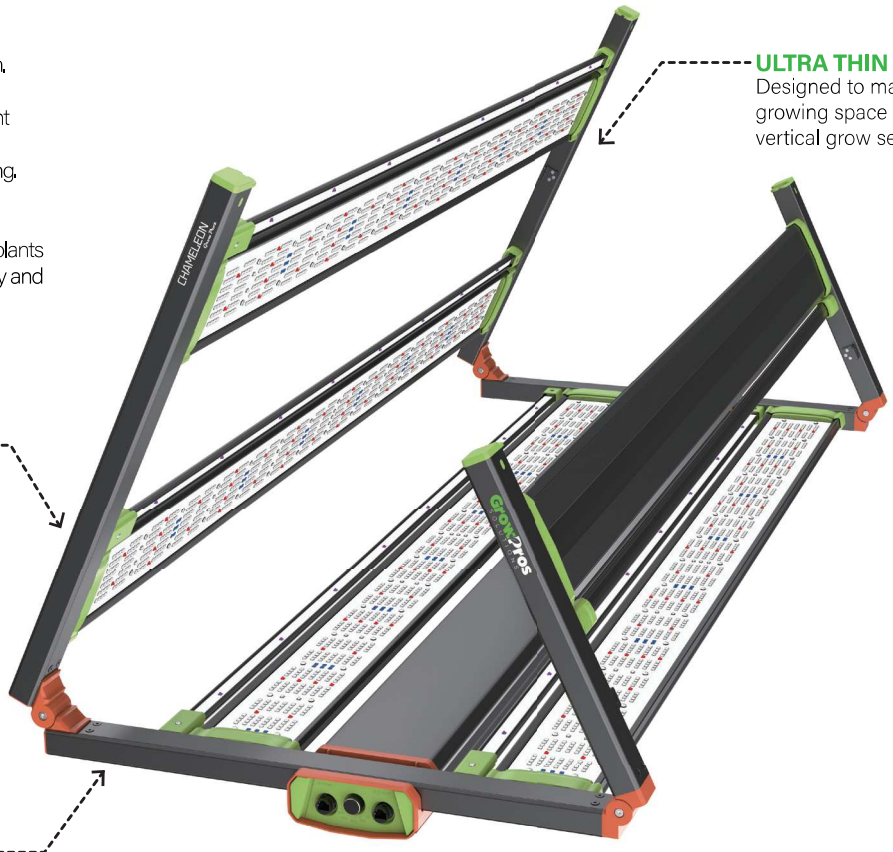

Commercial grow in mind-----
supporting 208-277V power

Easy Assembly -----
Designed for effortless installation with no assembly requried. Ready to use upon unpacking.

CHANNEL 1	UVA - 5.5%
CHANNEL 2	6200K + 437.5nm Blue - 70%
CHANNEL 3	660nm Deep Red - 18%
CHANNEL 4	730nm Far Red - 6.5%

WWW.WEGROWPROS.COM

Address: 5411 Daniels Street, Chino, CA 91710
Tel: (800) 383-6200 | **Email:** info@wegrowpros.com

GrowPros SOLUTIONS

1500W

GPS-UWRI1500-55

COMMERCIAL SOLUTIONS DESIGNED SPECIFICALLY FOR INDOOR CANNABIS CULTIVATION

SPECIFICATIONS	
WATTAGE	1500W
INPUT VOLTAGE	120-277V
CONTROL	0-10V DIMMING
POWER FREQUENCY	50/60Hz
POWER FACTOR	>0.9
THD	⩽20%
THERMAL MANAGEMENT	PASSIVE
WORKING TEMPERATURE	0°F to 113°F
IP RATING	Suitable for dry and damp locations
HEAT LOAD PER FIXTURE	5,115 BTUs

MAXIMUM POWER ELECTRICAL DATA

	120V	240V	277V
AC CURRENT	12.5A	6.25A	5.41A
AC POWER	1495W	1473W	1450W
POWER FACTOR	0.997	0.982	0.967

PPFD READING

12" Height @ 100% (1500W)


5X5

826			1080		1126		1130			795
	1206				1454				1219	
		1453			1653			1387		
1134			1895		1950		1858			979
				1990	2082	1967				
1226	1645	1739	2015	2015	2101	1991	2004	1816	1566	1064
				1962	2028	1940				
1168			1825		1901		1797			932
		1348			1554			1256		
	1084				1324				1104	
824			991		1030		990			741

PERFORMANCE DATA	MAX POWER @ 12" H
PPF	3430 µmol/s
PPFD	2101 µmol/m2/s
PPE	3.02 µmol/J

FULL SPECTRUM + IR

Spectrum

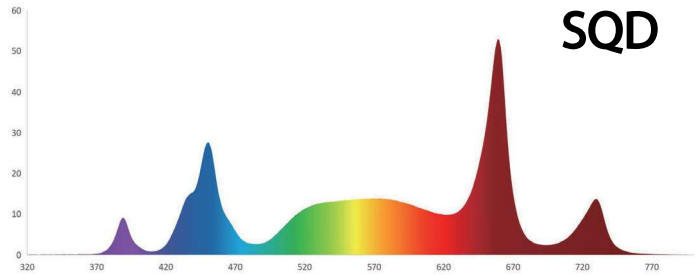

Wavelength (nm)

Quad Channel Spectrum Controls

DIMENSIONS



WWW.WEGROWPROS.COM

Address: 5411 Daniels Street, Chino, CA 91710

Tel: (800) 383-6200 | **Email:** info@wegrowpros.com

GrowPros SOLUTIONS

1250W
GPS-UWRI1250-55

COMMERCIAL SOLUTIONS DESIGNED SPECIFICALLY FOR INDOOR CANNABIS CULTIVATION

SPECIFICATIONS	
WATTAGE	1250W
INPUT VOLTAGE	120-277V
CONTROL	0-10V DIMMING
POWER FREQUENCY	50/60Hz
POWER FACTOR	>0.9
THD	⩽20%
THERMAL MANAGEMENT	PASSIVE
WORKING TEMPERATURE	0°F to 113°F
IP RATING	Suitable for dry and damp locations
HEAT LOAD PER FIXTURE	4,262.5 BTUs

MAXIMUM POWER ELECTRICAL DATA

	120V	240V	277V
AC CURRENT	10.41A	5.21A	4.51A
AC POWER	1243W	1224W	1200W
POWER FACTOR	0.996	0.979	0.961

PPFD READING

12" Height @ 100% (1250W)


5X5

695			911		956		960			683
	1019				1235				1030	
		1251			1395			1201		
961			1615		1609		1594			823
				1710	1777	1687				
1039	1446	1516	1728	1723	1790	1708	1704	1533	1360	899
				1684	1741	1689				
998			1587		1629		1540			785
		1161			1321			1122		
	930				1132				944	
704			842		866		847			637

PERFORMANCE DATA	MAX POWER @ 12" H
PPF	3813 µmol/s
PPFD	1760 µmol/m2/s
PPE	3.05 µmol/J

FULL SPECTRUM + IR

Spectrum

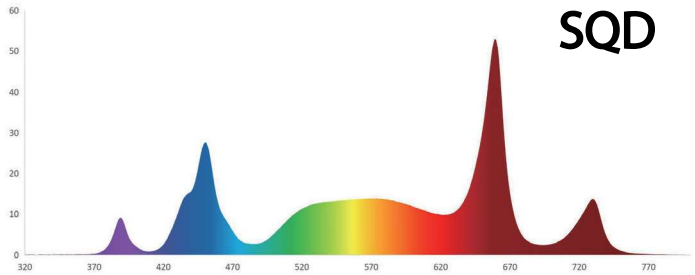

Wavelength (nm)

Quad Channel Spectrum Controls

DIMENSIONS



WWW.WEGROWPROS.COM

Address: 5411 Daniels Street, Chino, CA 91710

Tel: (800) 383-6200 | **Email:** info@wegrowpros.com

GrowPros SOLUTIONS

1000W

GPS-UWRI1000-55

COMMERCIAL SOLUTIONS DESIGNED SPECIFICALLY FOR INDOOR CANNABIS CULTIVATION

SPECIFICATIONS	
WATTAGE	1000W
INPUT VOLTAGE	120-277V
CONTROL	0-10V DIMMING
POWER FREQUENCY	50/60Hz
POWER FACTOR	>0.9
THD	⩽20%
THERMAL MANAGEMENT	PASSIVE
WORKING TEMPERATURE	0°F to 113°F
IP RATING	Suitable for dry and damp locations
HEAT LOAD PER FIXTURE	3,410 BTUs

MAXIMUM POWER ELECTRICAL DATA

	120V	240V	277V
AC CURRENT	8.33A	4.16A	3.61A
AC POWER	993W	962W	939W
POWER FACTOR	0.993	0.964	0.939

PPFD READING

12" Height @ 100% (1000W)


5X5

621			772		818		815			617
	860				1056				885	
		1001			1146			944		
821			1290		1345		1289			701
				1390	1433	1365				
885	1140	1274	1401	1405	1449	1393	1389	1289	1100	767
				1369	1410	1362				
853			1273		1313		1252			664
		941			1073			906		
	795				959				802	
629			709		738		713			601

PERFORMANCE DATA	MAX POWER @ 12" H
PPF	3060 µmol/s
PPFD	1449 µmol/m2/s
PPE	3.06 µmol/J

FULL SPECTRUM + IR

Spectrum

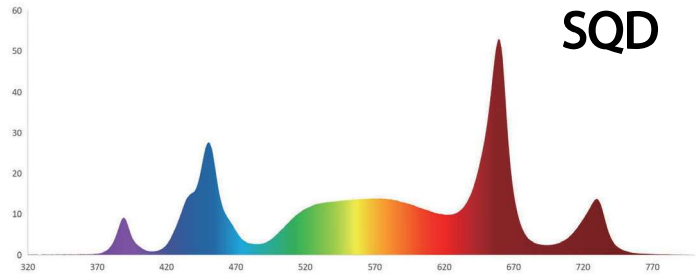

Wavelength (nm)

Quad Channel Spectrum Controls

DIMENSIONS



WWW.WEGROWPROS.COM

Address: 5411 Daniels Street, Chino, CA 91710

Tel: (800) 383-6200 | **Email:** info@wegrowpros.com