GrowPros SOLUTIONS

COMMERCIAL SOLUTIONS DESIGNED SPECIFICALLY FOR INDOOR CULTIVATION

ULTRA-960 PRO



Intertek FOR DAMP LOCATION DLC LISTED

Model/Rebate/DLC

GPS-ULTRA-960-PRO
GPS-ULTRA-830-PRO
GPS-ULTRA-660-PRO

Our Ultra Series represent the ideal LED grow lights designed for vertical growers. These lights feature a sleek, flat body with a high photon conversion rate and low heat emission, making them perfectly compatible with popular two-tier or three layer grow racks from Pippe, Grow Pros Solutions, Montel, and more.

INTENDED APPLICATIONS


- Multi-tier Vertical Grow Systems
- Indoor Cultivation

RECOMMEDED SET-UP

- **FLOWER:** 4' X 4' Area; Max: 5' X 5' Area
- **VEG:** 4' X 4' Area; Max: 6' X 6' Area

FEATURES & BENEFITS

- Experience optimal plant growth with our Full Spectrum, including Far Red lighting.
- Perfect for vertical cultivation, our ultra-slim design maximizes space efficiency.
- Designed for commercial use, supporting 208-277V power outlets for robust performance.
- Enjoy hassle-free setup with our foldable design - simply open and use, no assembly required.

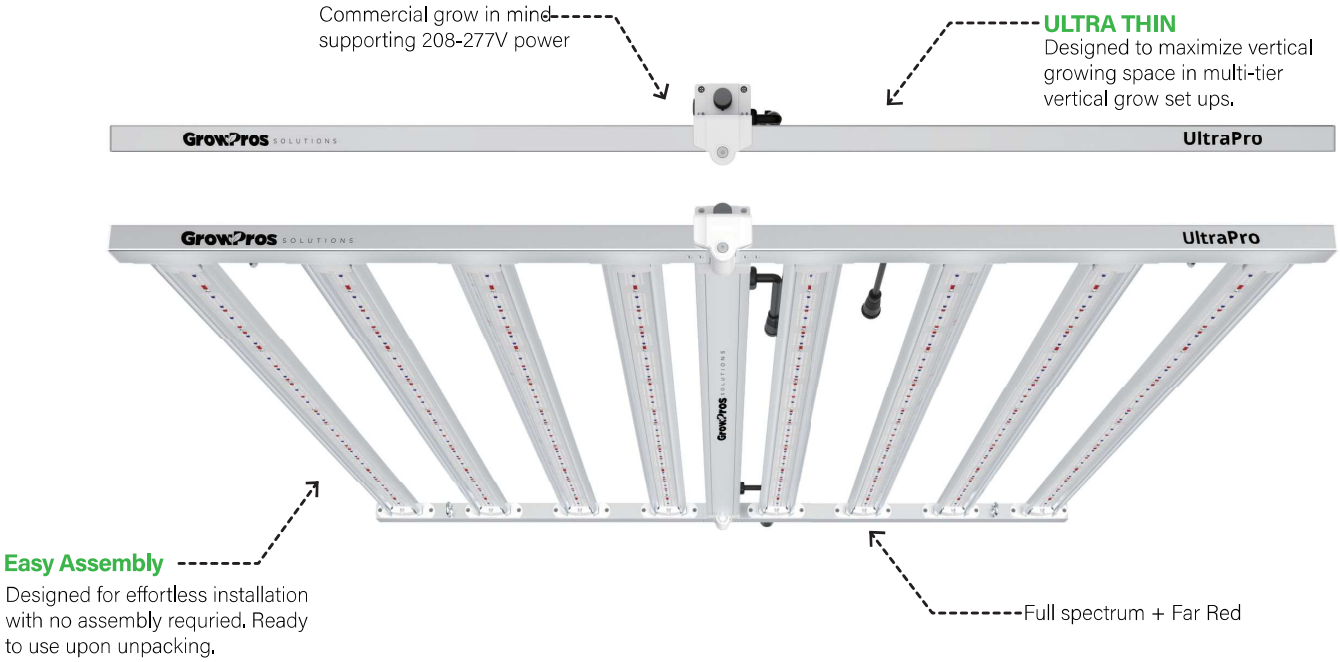

WWW.WEGROWPROS.COM

Address: 5411 Daniels Street, Chino, CA 91710
Tel: (800) 383-6200 | **Email:** info@wegrowpros.com

GrowPros SOLUTIONS

960W


GPS-ULTRA-960-PRO

COMMERCIAL SOLUTIONS DESIGNED SPECIFICALLY FOR INDOOR CULTIVATION

SPECIFICATIONS	
WATTAGE	960W
INPUT VOLTAGE	208-277V
CONTROL	0-10V DIMMING
DAISY CHAIN PORT	RJ-45
POWER FACTOR	>0.9
MOUNTING HEIGHT	12-24 INCHES ABOVE CANOPY
THERMAL MANAGEMENT	PASSIVE
WORKING TEMPERATURE	32°F to 104°F
DIODE LIFETIME	L90: >36,000hrs
DRIVER LIFETIME	>50,000 hrs
CERTIFICATIONS	ETC, DLC
HEAT LOAD PER FIXTURE	3,273.6 BTUs

PERFORMANCE DATA	MAX POWER @ 12" H
PPF	2688 µmol/s
PPFD	1914 µmol/m2/s
PPE	3.18 µmol/J

FULL SPECTRUM + FAR RED

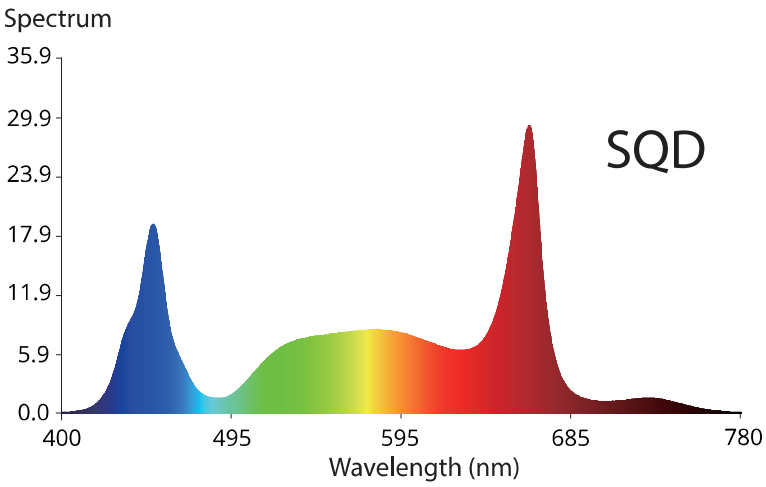

MAXIMUM POWER ELECTRICAL DATA

		220V	240V	277V
AC CURRENT	4.62A	4.36A	4.0A	3.47A
AC POWER	960W	962W	960W	956W
POWER FACTOR	0.9	0.9	0.9	0.9


PPFD READING

12" Height @ 100% (960W)

4' X 4' 3' X 3' 2' X 2' 1' X 1'

818		941		1036		950		816
	1409						1422	
1140		1768		1801		1782		1102
	1638		1881	1879	1891		1615	
1210		1883	1913	1914	1909	1873		1226
	1641		1778	1910	1895		1621	
1142		1778		1815		1776		1104
	1410						1420	
817		943		1042		961		819

DIMENSIONS

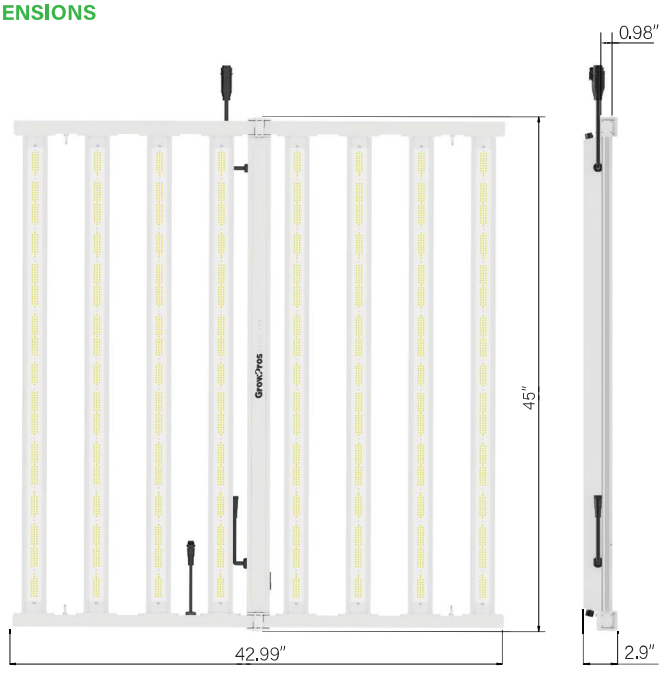

LIGHT WEIGHT: 20.2 lbs

WWW.WEGROWPROS.COM

Address: 5411 Daniels Street, Chino, CA 91710

Tel: (800) 383-6200 | **Email:** info@wegrowpros.com

GrowPros SOLUTIONS

830W


GPS-ULTRA-830-PRO

COMMERCIAL SOLUTIONS DESIGNED SPECIFICALLY FOR INDOOR CULTIVATION

SPECIFICATIONS	
WATTAGE	830W
INPUT VOLTAGE	208-277V
CONTROL	0-10V DIMMING
DAISY CHAIN PORT	RJ-45
POWER FACTOR	>0.9
MOUNTING HEIGHT	12-24 INCHES ABOVE CANOPY
THERMAL MANAGEMENT	PASSIVE
WORKING TEMPERATURE	32°F to 104°F
DIODE LIFETIME	L90: >36,000hrs
DRIVER LIFETIME	>50,000 hrs
CERTIFICATIONS	ETC, DLC
HEAT LOAD PER FIXTURE	2,830.3 BTUs

PERFORMANCE DATA	MAX POWER @ 12" H
PPF	2240 µmol/s
PPFD	1595 µmol/m2/s
PPE	3.25 µmol/J

FULL SPECTRUM + FAR RED

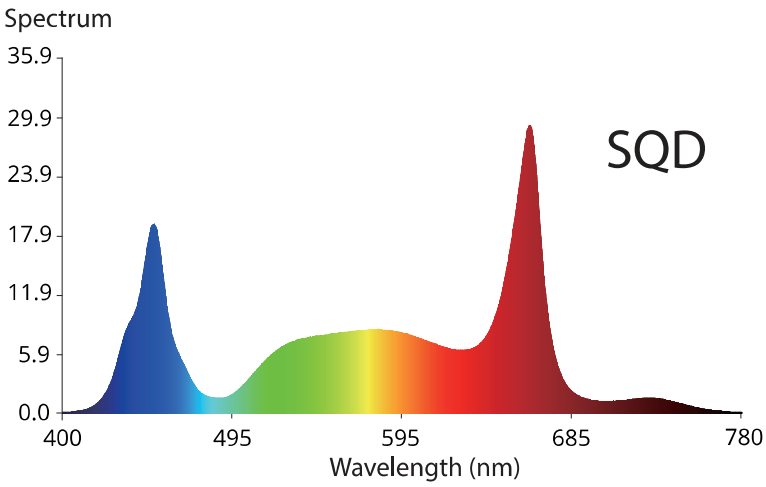

MAXIMUM POWER ELECTRICAL DATA

	208V	220V	240V	277V
AC CURRENT	4.0A	3.77A	3.46A	3.0A
AC POWER	835W	832W	830W	826W
POWER FACTOR	0.9	0.9	0.9	0.9


PPFD READING

12" Height @ 100% (830W)

4' X 4' 3' X 3' 2' X 2' 1' X 1'

715		784		863		792		713
	1191						1201	
950		1473		1501		1485		918
	1356		1568	1566	1576		1346	
1009		1569	1594	1595	1591	1561		1021
	1367		1579	1591	1580		1351	
952		1481		1512		1482		920
	1192						1200	
714		785		869		800		716

DIMENSIONS

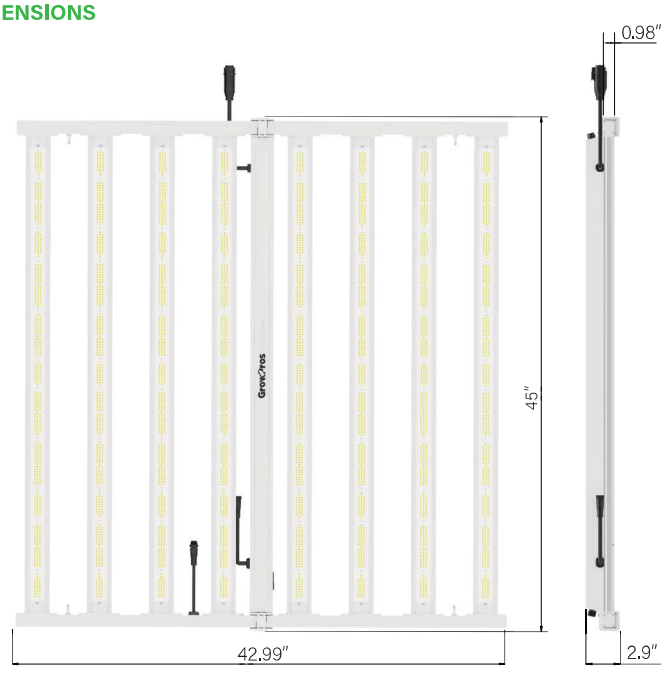

LIGHT WEIGHT: 20.2 lbs

WWW.WEGROWPROS.COM

Address: 5411 Daniels Street, Chino, CA 91710

Tel: (800) 383-6200 | **Email:** info@wegrowpros.com

GrowPros SOLUTIONS

660W


GPS-ULTRA-660-PRO

COMMERCIAL SOLUTIONS DESIGNED SPECIFICALLY FOR INDOOR CULTIVATION

SPECIFICATIONS	
WATTAGE	660W
INPUT VOLTAGE	208-277V
CONTROL	0-10V DIMMING
DAISY CHAIN PORT	RJ-45
POWER FACTOR	>0.9
MOUNTING HEIGHT	12-24 INCHES ABOVE CANOPY
THERMAL MANAGEMENT	PASSIVE
WORKING TEMPERATURE	32°F to 104°F
DIODE LIFETIME	L90: >36,000hrs
DRIVER LIFETIME	>50,000 hrs
CERTIFICATIONS	ETC, DLC
HEAT LOAD PER FIXTURE	2,250.6 BTUs

PERFORMANCE DATA	MAX POWER @ 12" H
PPF	1848 µmol/s
PPFD	1316 µmol/m2/s
PPE	3.28 µmol/J

FULL SPECTRUM + FAR RED

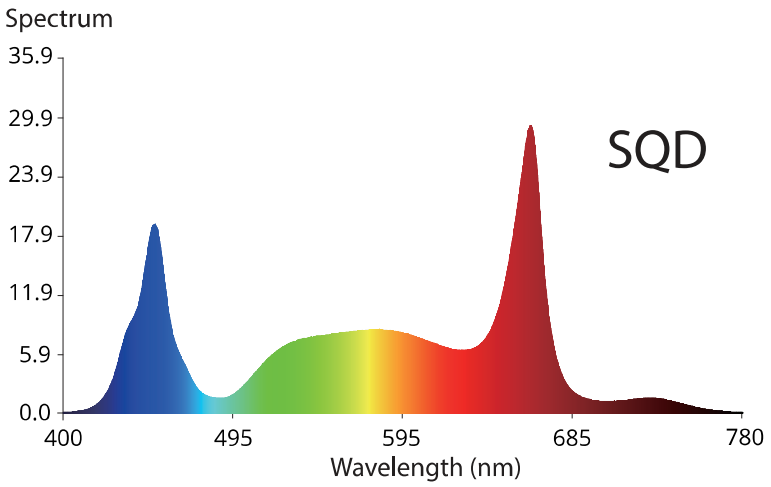

MAXIMUM POWER ELECTRICAL DATA

	208V	220V	240V	277V
AC CURRENT	3.17A	3.0A	2.75A	2.38A
AC POWER	660W	662W	660W	660W
POWER FACTOR	0.9	0.9	0.9	0.9


PPFD READING

12" Height @ 100% (660W)

4' X 4' 3' X 3' 2' X 2' 1' X 1'

525		647		712		653		523
	900						909	
784		1216		1238		1225		758
	1126		1293	1292	1300		1110	
832		1295	1315	1316	1312	1287		843
	1128		1302	1313	1303		1114	
785		1222		1248		1223		759
	901						907	
524		648		717		660		526

DIMENSIONS

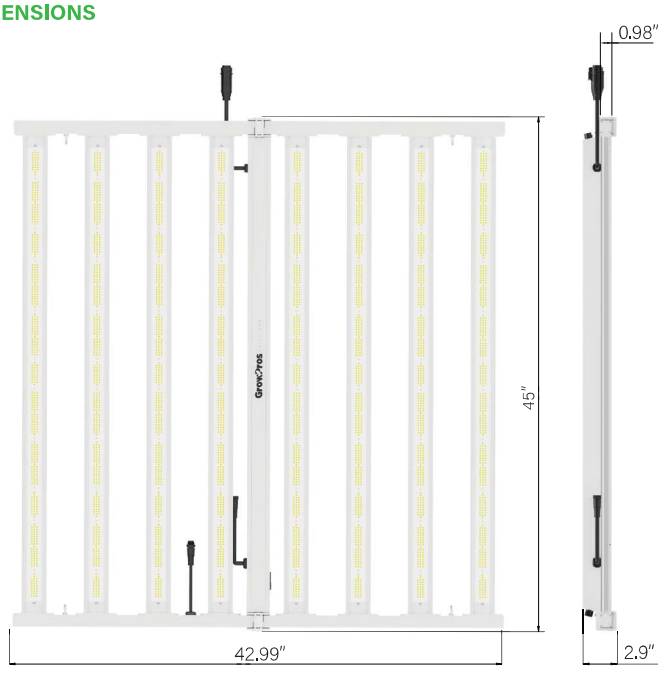

LIGHT WEIGHT: 20.2 lbs

WWW.WEGROWPROS.COM

Address: 5411 Daniels Street, Chino, CA 91710

Tel: (800) 383-6200 | **Email:** info@wegrowpros.com