GrowPros SOLUTIONS

COMMERCIAL SOLUTIONS DESIGNED SPECIFICALLY FOR INDOOR CULTIVATION

Under Canopy Lighting 8Ft



Intertek IP65 FOR DAMP LOCATION

Model/Rebate/DLC

GPS-UCL1-250W-8FT

Upgrade your cultivation and leave no buds behind. By utilizing our specially designed under canopy lights ou can maximize your growth and yields by illuminating the previously underlit areas of your plants.

FEATURES & BENEFITS

- Improve B-bud size, structure, density, and coloring.
- Optimized full spectrum proven by growers - great for veg and exceptional for boosting flower - includes 3000k, 5000k, 660nm Deep Red, and 730nm infrared diodes.
- IP65 rated for easy cleaning and protection from IPM sprays, irrigation leaks, and employees getting crazy with the watering wand.
- Compact and lightweight, quick to set up, easy to work around for harvest or quick to uninstall when between trellis layers.
- One Under Canopy Light will cover 4' in length and 3' in width of under canopy, add a second row to further increase your yields!



Hang from above in static canopies or use our height adjustable legs with rolling benches.

LINK UP MULTIPLE FIXTURES
Power Chaining and Data Chaining through same connections, no extra wires required.
Daisy chain option:
4 pcs @ 120V
5 pcs @ 208V
8 pcs @ 240V
9 pcs @ 277V



Rated IP65; worry free when spraying

Aluminum housing results in 10x faster heat dissipation compared to plastic shells.

ADJUSTABLE HEIGHT
Telescopic legs adjust to the plant growth for the perfect light coverage.
*Legs sold seperately

WWW.WEGROWPROS.COM

Address: 5411 Daniels Street, Chino, CA 91710
Tel: (800) 383-6200 | **Email:** info@wegrowpros.com


GrowPros SOLUTIONS

COMMERCIAL SOLUTIONS DESIGNED SPECIFICALLY FOR INDOOR CULTIVATION

SPECIFICATIONS	
WATTAGE	250W
INPUT VOLTAGE	120V-277V
CONTROL	0-10V DIMMING
DATA CONNECTION	Waterproof RJ-45
POWER FACTOR	>0.9
THERMAL MANAGEMENT	PASSIVE
WORKING TEMPERATURE	0°F to 104°F
IP RATING	Waterproof IP65
LIFETIME	L90: >36,000 hrs
CERTIFICATIONS	ETL, DLC
HEAT LOAD PER FIXTURE	852.5 BTUs

PERFORMANCE DATA	MAX POWER
PPE	2.89 µmol/J
PPF	719 µmol/s


FULL SPECTRUM + IR

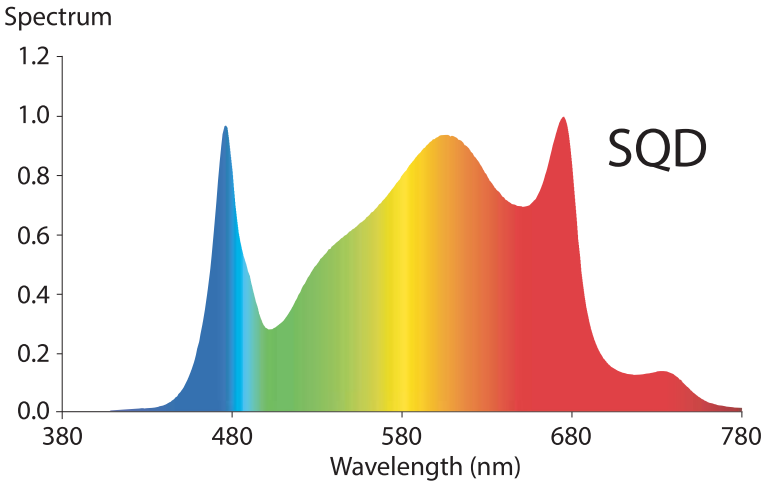

MAXIMUM POWER ELECTRICAL DATA

	120V	208V	240V	277V
AC CURRENT	2.08A	1.20A	1.04A	0.90A
AC POWER	131.5W	126.9W	126.4W	126.1W
POWER FACTOR	0.99	0.99	0.98	0.97
DAISY CHAIN	4	5	8	9

DIMENSIONS

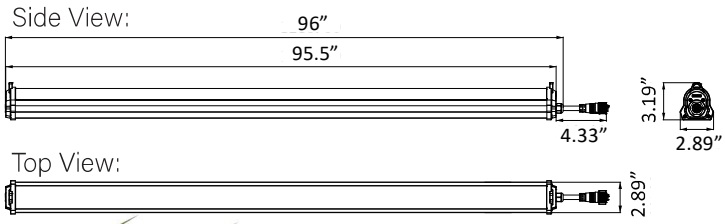



INSTALLATION AND SAFETY REQUIREMENTS

UCL LED lights must be installed on Grow Pros light stands or on a stable, nonflammable surface. Maintain at least 6 inches clearance from all combustible materials, including but not limited to plastic pots, plastic trays, wood, cardboard, ropes, and PVC.
The fixture must be properly supported and secured to prevent contact with surrounding materials, and reduce stress on cord connections.
Failure to follow installation requirements may result in fire hazard and will void the limited warranty.

WWW.WEGROWPROS.COM

Address: 5411 Daniels Street, Chino, CA 91710

Tel: (800) 383-6200 | **Email:** info@wegrowpros.com