ILUMINAR

HYPERMOL EFX

MODEL: HyperMol 1000W **WATTS** 1000W
VOLTAGE: 110 - 277V **SKU** IL-HMOL-1000-EFX


TECHNICAL SPECS


Rated Voltage	AC 110 - 277V
Power Consump	1000W ± 5%
Power Supply	Fahold LED Drivers
PPF	2900 µmol/s
Efficacy	2.9 µmol/J
LED Spectrum	Full Spectrum
Power Factor	>0.9
Control	Dimmer / 0-10V input and output
Frequency	60Hz
Ambient Temperature - Working	0°C - 35°C / 32° - 95°F
Light Distribution - Beam Angle	120 Degree
Waterproof Rating	IP65
LED Lifespan (90% of Life)	50000 hours
Daisy Chain	Max. 45 * fixtures by daisy chain
Light Source	Samsung LM281B+ Pro * 2800 pcs 4000K LED+ Honglitronic SMD3535 660nm * 240 pcs




PHYSICAL SPECIFICATIONS

Height	115mm / 4.5"
Weight - N.W./G.W.	16.5kg/17.5kg | 36.37bs / 35.7lbs

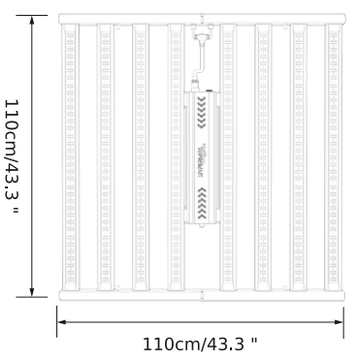




SPECTRUM

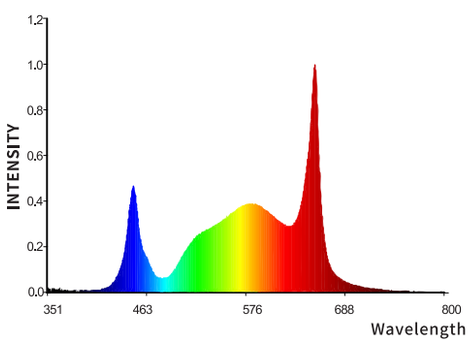

CONTROL DIAGRAM

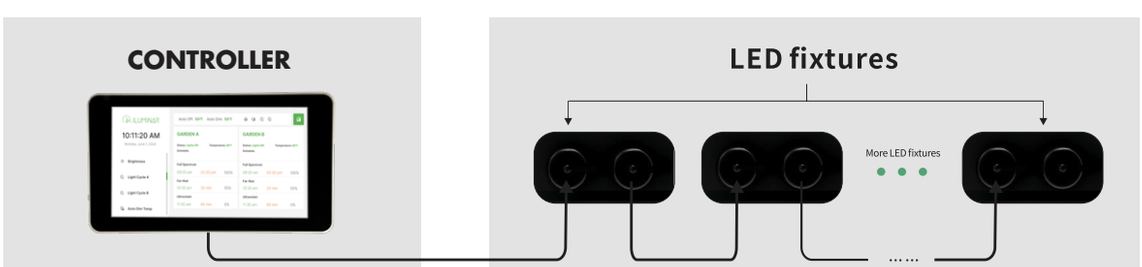







5 YEAR WARRANTY

www.iluminarlighting.com 1-877-540-5588 sales@iluminarlighting.com

© Copyright 2026 ILUMINAR Lighting. Subject to change without notice.