MATRIX

M6 Dyna

PPE 3.2 µmol/J | **Dynamic Spectrum with Constant Power** | **4-Channel Spectrum Tuning** with Independent Far Red & UV Control

Specifications

Input Power	760W (Main645W+FR85W+UV30W)
Input Voltage	120V-277V
PPF	up to 2060µmol/s
PPE	up to 3.2µmol/J
Frequency	50/60Hz
Power Factor	>95%

Thermal Management	Passive
IP Rating	IP66
Size	43.8"L x 48.0"W x 2.5"H 1112 x 1220 x 64mm
Weight	34.2lbs 15.5kg
Warranty	5-year warranty
Certificate	ETL/TISI/CE/UL8800

PPFD


Height 12"

802			1179			832
	1212		1451		1215	
		1502	1561	1519		
1041	1347	1505	1563	1533	1405	1056
		1483	1547	1541		
	1244		1437		1275	
827			1184			784


4 Ft (122CM)

4 Ft (122CM)

Dimensions

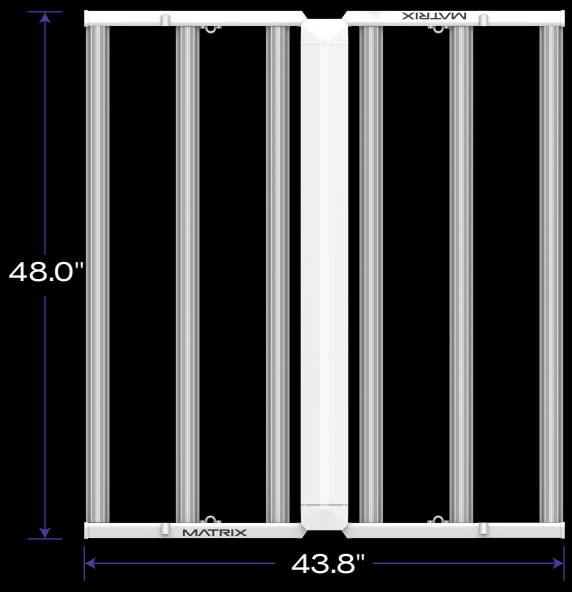

Spectrum Options

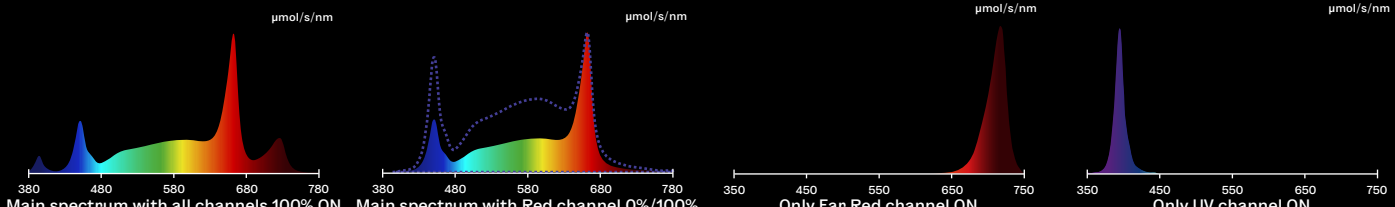

* Precise control over UV, Deep Red, White and Far Red enables growers to create any light recipes.
* The UV and Far Red channels can be independently adjusted from 25% to 100%.