MODEL-I PLUS
LED Grow Light

SPECIFICATIONS


PPF:	Up to 2088 μmol/s
Efficacy:	Up to 2.9 μmol/J
Input Power:	720 W
Power Factor:	⩾ 96%
Fixture Dimensions/Weight:	45.34"L x 4.37" W x 6.32" H / 21.96lbs
Mounting Height:	> 2.5ft (76.2cm) Above Canopy
Lifetime:	L90 : ＞54,000 hrs
Warranty:	5 Years Standard Warranty
Input Voltage:	Autosensing 100-277 V~
Amp Draw:	120V/6.23A, 240V/3.09A, 277V/2.71A
IP Rating:	IP66

FEATURES

- Outstanding Efficacy up to 2.9 μmol/J
- Slim design with built-in driver
- Innovative V-shape LED panel
- Ultimate controllability on UV, White, Deep Red and Far Red channels
- External control ability

MODEL-I PLUS
Tested at 2.5ft


Average PPFD **684**

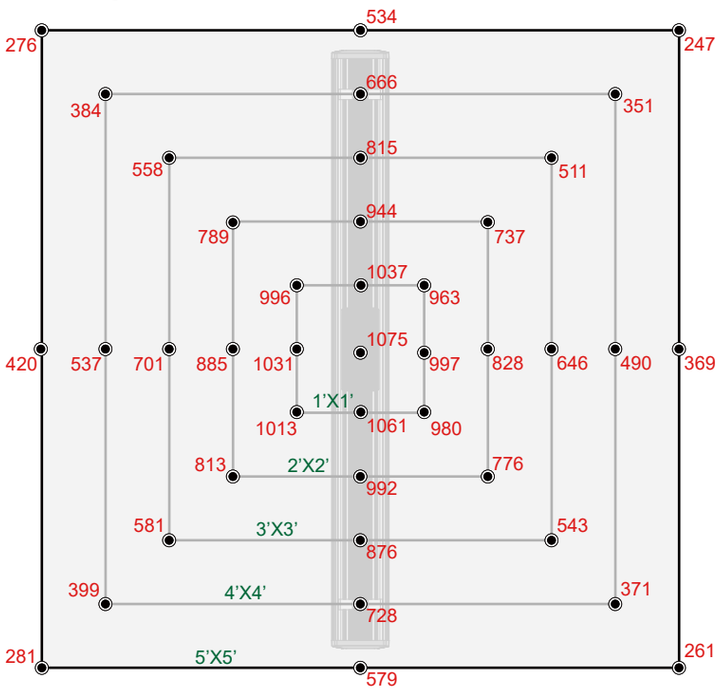

DIMENSIONS



SIDE VIEW

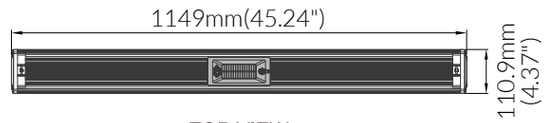


TOP VIEW




FRONT VIEW

SPECTRUM


Efficacy: Up to 2.9 μmol/J

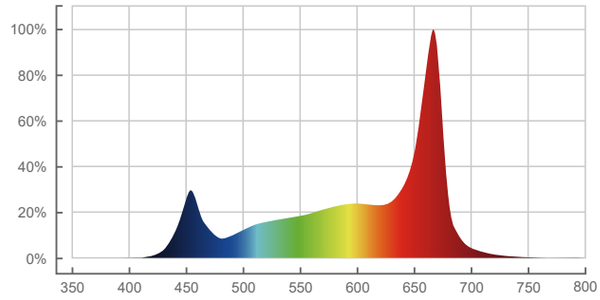

Efficacy: Up to 2.8 μmol/J

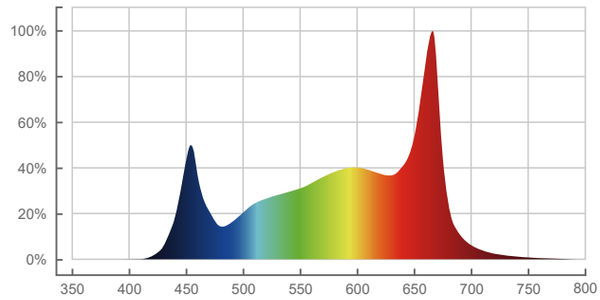

Efficacy: Up to 2.7 μmol/J

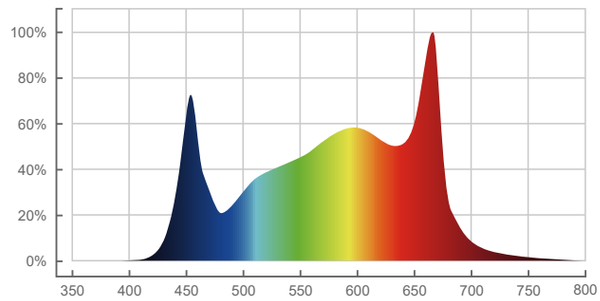

MODEL-I PLUS (480V)
LED Grow Light

SPECIFICATIONS


PPF:	Up to 2088 μmol/s
Efficacy:	Up to 2.9 μmol/J
Input Power:	720 W
Power Factor:	⩾ 96%
Fixture Dimensions/Weight:	45.34"L x 4.37" W x 6.32" H / 21.96lbs
Mounting Height:	> 2.5ft (76.2cm) Above Canopy
Lifetime:	L90 : ＞54,000 hrs
Warranty:	5 Years Standard Warranty
Input Voltage:	Autosensing 347-480V~
Amp Draw:	347V/2.09A, 480V/1.55A
IP Rating:	IP66

FEATURES

- Outstanding Efficacy up to 2.9 μmol/J
- Slim design with built-in driver
- Innovative V-shape LED panel
- Ultimate controllability on UV, White, Deep Red and Far Red channels
- External control ability

MODEL-I PLUS (480V)
Tested at 2.5ft


Average PPFD **684**

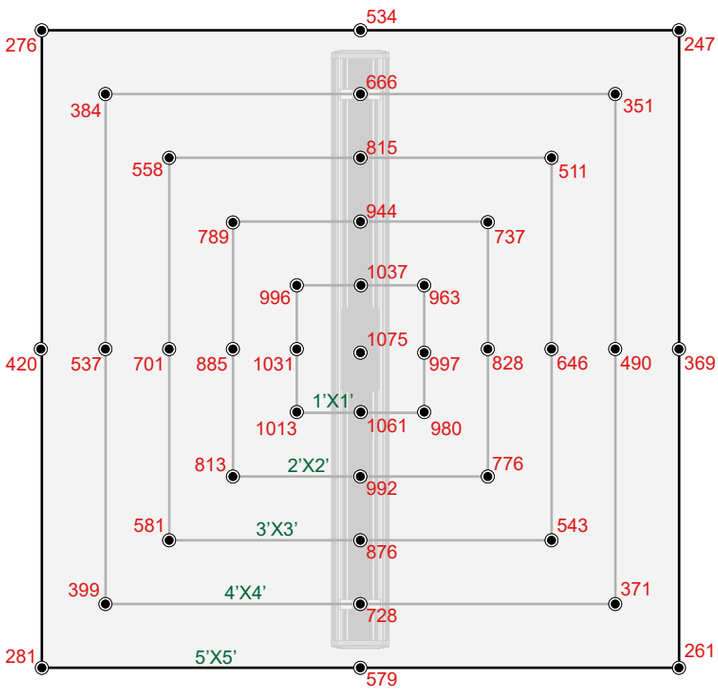

DIMENSIONS



SIDE VIEW

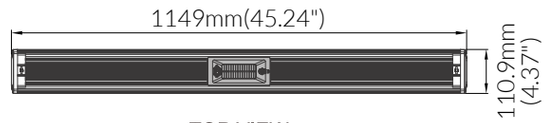


TOP VIEW




FRONT VIEW

SPECTRUM

Efficacy: Up to 2.9 μmol/J

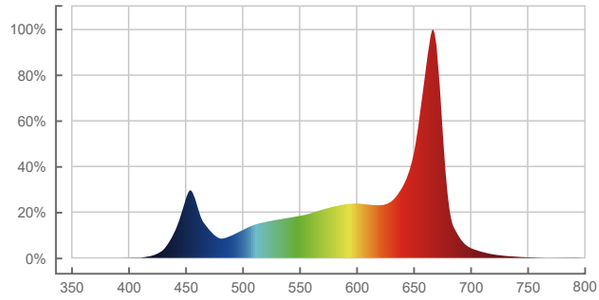

Efficacy: Up to 2.8 μmol/J

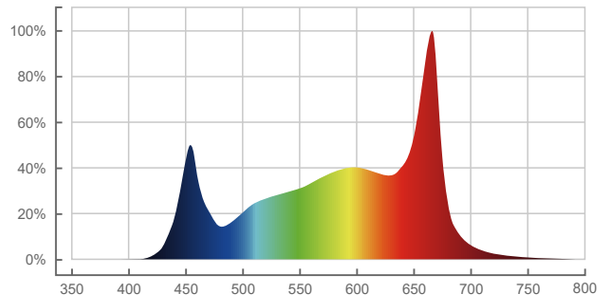

Efficacy: Up to 2.7 μmol/J

