
# MODEL-I
## LED Grow Light

## SPECIFICATIONS

| | |
|---|---|
| PPF: | Up to 2016 µmol/s |
| Efficacy: | Up to 2.8 µmol/J |
| Input Power: | 720 W |
| Power Factor: | ⩾ 96% |
| Fixture Dimensions/Weight: | 45.34"L x 4.37" W x 6.32" H / 21.96lbs |
| Mounting Height: | > 2.5ft (76.2cm) Above Canopy |
| Lifetime: | L90 : >54,000 hrs |
| Warranty: | 5 Years Standard Warranty |
| Input Voltage: | Autosensing 100-277 V~ |
| Amp Draw: | 120V/6.23A, 240V/3.09A, 277V/2.71A |
| IP Rating: | IP66 |

## MODEL-I
**Tested at 2.5ft**


Average PPFD **657**

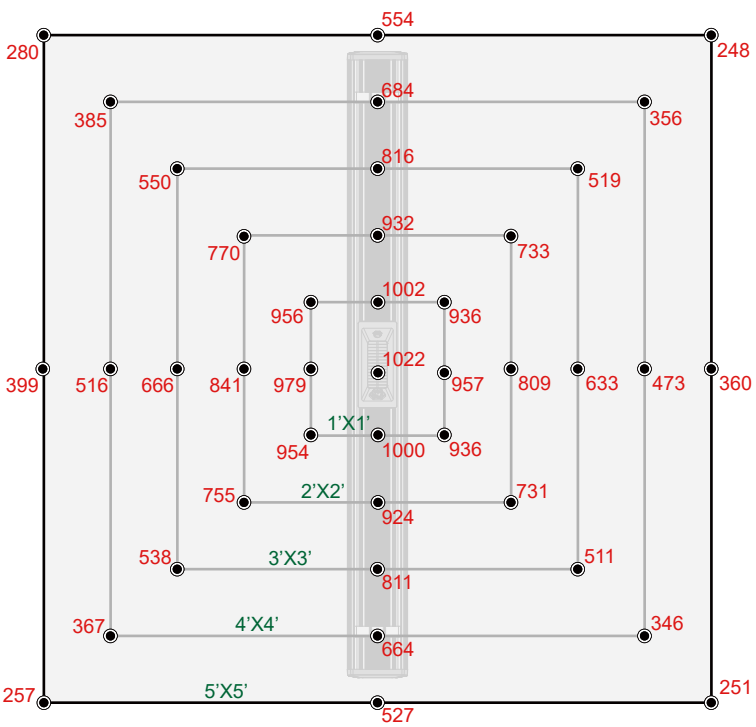


## DIMENSIONS



SIDE VIEW

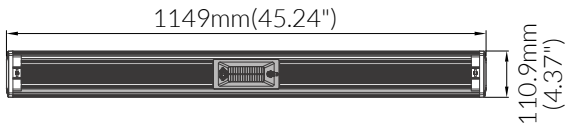


TOP VIEW





FRONT VIEW

## FEATURES


- Outstanding Efficacy up to 2.8 µmol/J
- Slim design with built-in driver
- Innovative V-shape LED panel
- Full spectrum with UV design
  Individual Far Red channel
- External control ability

## SPECTRA

Full Spectrum

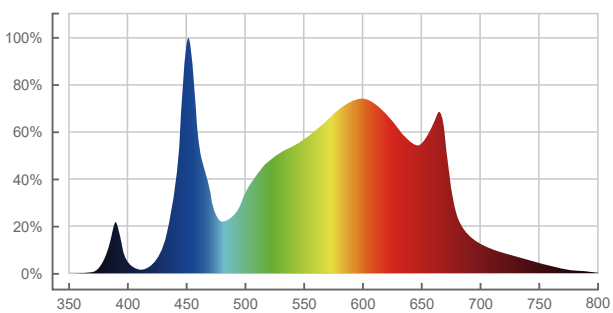


Far Red

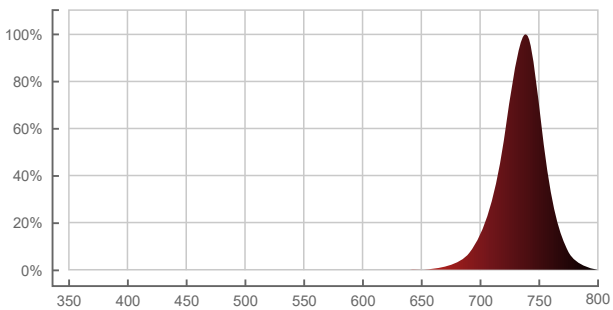


# MODEL-I (480V)
**LED Grow Light**

## SPECIFICATIONS

| | |
|---|---|
| PPF: | Up to 2016 µmol/s |
| Efficacy: | Up to 2.8 µmol/J |
| Input Power: | 720 W |
| Power Factor: | ⩾ 96% |
| Fixture Dimensions/Weight: | 45.34"L x 4.37" W x 6.32" H / 21.96lbs |
| Mounting Height: | > 2.5ft (76.2cm) Above Canopy |
| Lifetime: | L90 : >54,000 hrs |
| Warranty: | 5 Years Standard Warranty |
| Input Voltage: | Autosensing 347-480V~ |
| Amp Draw: | 347V/2.09A, 480V/1.55A |
| IP Rating: | IP66 |

## MODEL-I (480V)
**Tested at 2.5ft**


Average PPFD **657**

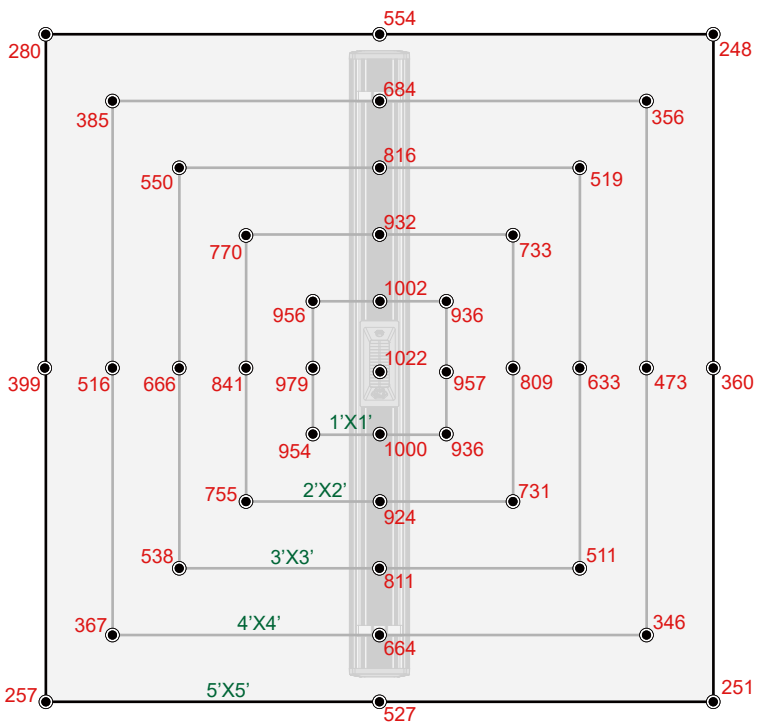


## DIMENSIONS



SIDE VIEW

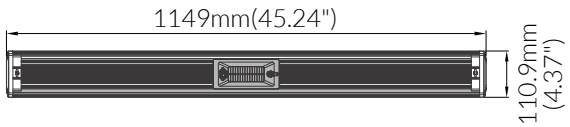


TOP VIEW





FRONT VIEW

## FEATURES

- Outstanding Efficacy up to 2.8 µmol/J
- Slim design with built-in driver
- Innovative V-shape LED panel
- Full spectrum with UV design
  Individual Far Red channel
- External control ability

## SPECTRA

Full Spectrum

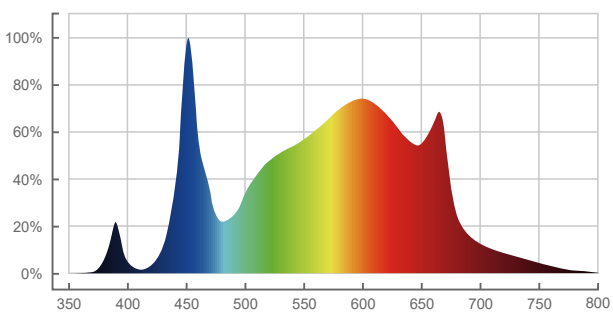


Far Red

