SCC-3

Standard Controller Cabinet

The SCC-3 Standard Controller Cabinet is a modular electrical and wire management enclosure system for TrolMaster Control system.



The cabinet is designed to allow the HCS-3 / NFS-3 TrolMaster controller to be installed in a clean and professional manner.A pre-cut opening allows TrolMaster's main controller Hydro-X Plus (HCS-3) / Aqua-X Plus (NFS-3) to be easily installed and provide a proffessional and clean installation for
your control system. All low-volt device stations can be mounted inside the IP56 rated electrical cabinet to keep the device stations clean and dry. Users can safely mount and neatly organize the power supplies, modules, and RJ12 cables with ease.

***Note:** In order to achieve the IP56 standard, you must use the provided "controller rubber gasket" and perfectly fit the gasket between the controller and cabinet door.

Specifications

SCC-3

Input Voltage

Input Voltage	120V~, 50/60Hz

Maximum Input Current

Current	15A

Ingress Protection

Ingress Protection	IP56

Cabinet Capacity

Splitter Board Group #1	10 Ports (Top)
Splitter Board Group #2	6 Ports (Top)
Splitter Board Group #3	17 Ports (Top)
Splitter Board Group #4	2 x 4 ports (Detachable Splitter Bars) 2 ports (Device) 6 ports (Bottom)
Power Outlet	4+1+6
Max No. of Modules (TS/HS/TSH/VPD)	8

Working Environments

Temperature	32-104°F (0-40°C)
Humidity	≤90%RH

Package Dimensions

Size	26.77inch / 680mm (L) x 20.08inch / 510mm (W) x 8.86inch / 225mm (H)
Gross Weight	37.57lbs / 17.04kg


Package Contents

Standard Controller Cabinet	1 pc
Controller Rubber Gasket	1 pcs
Short RJ-12 Cables	16 pcs
Power Cables (for OA6 modules)	4 pcs
OA6-24 Screw Set	10 pcs
Installation Manual	1 pcs


Link Up

SCC-3

CABINET LAYOUT

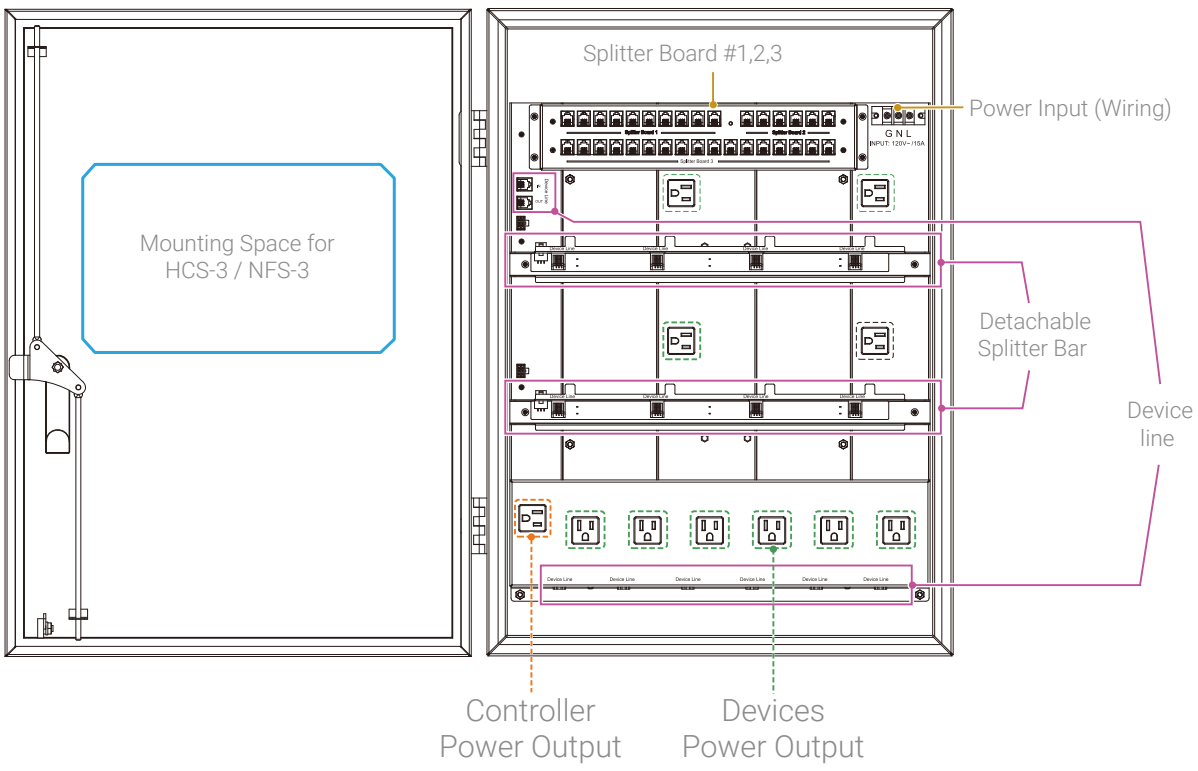

CABINET DIMENSION

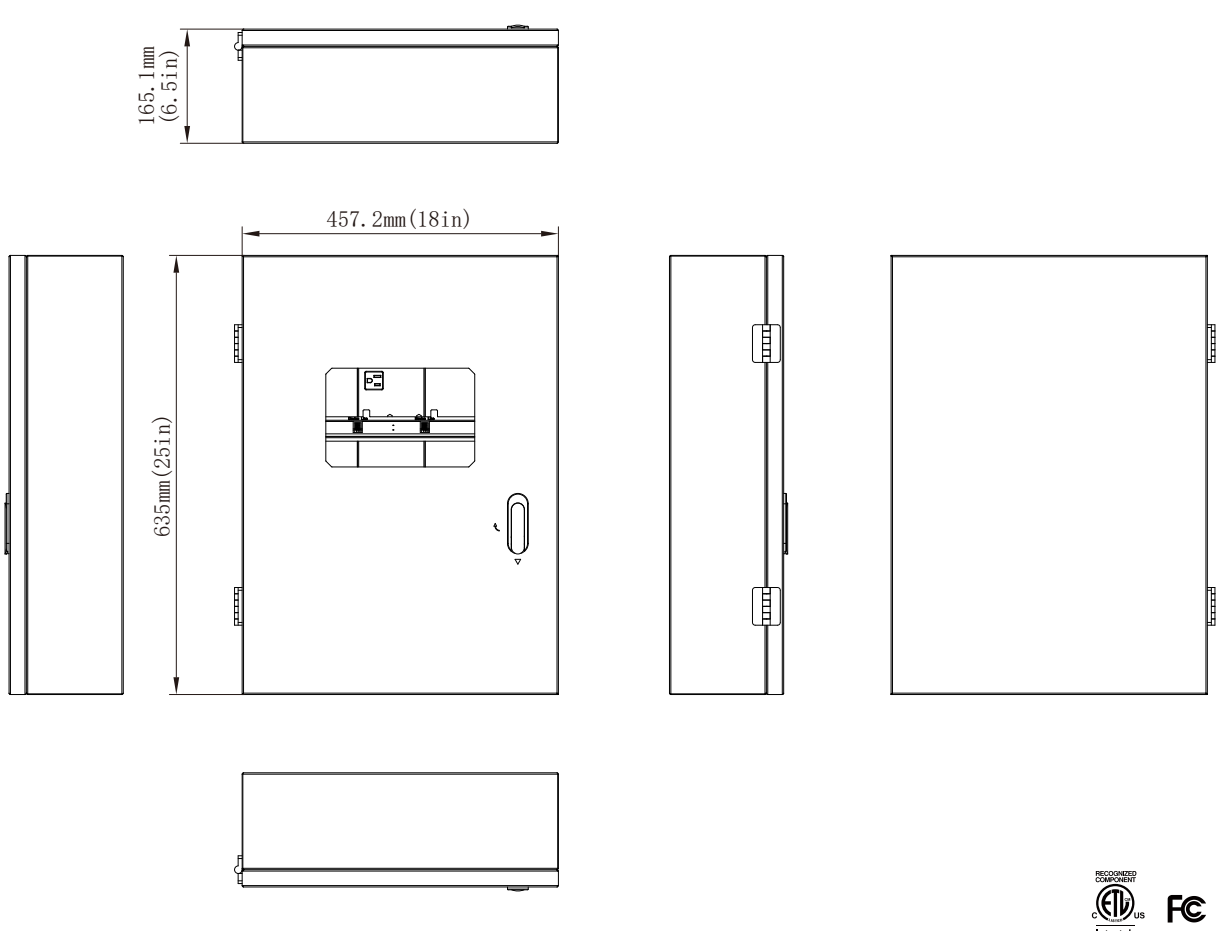

© 2025 TrolMaster Agro Instruments Co., Ltd. All rights reserved.

Email: support@trolmaster.com
Phone: 877-420-9876