# FAVEN

## R SERIES | UNDER CANOPY LIGHTING

### FINANCIALS

ROI in one Harvest.
Reduce Labour Inputs.



### YIELD

Drive Revenue Targets:
20-40% Yield Increase on Average.


### QUALITY

Sell Product Quickly:
Reduce Low Value SKUS.




### UNIFORMITY

Top Dollar for your Product:
Uniform in Color, Shape, and Density.

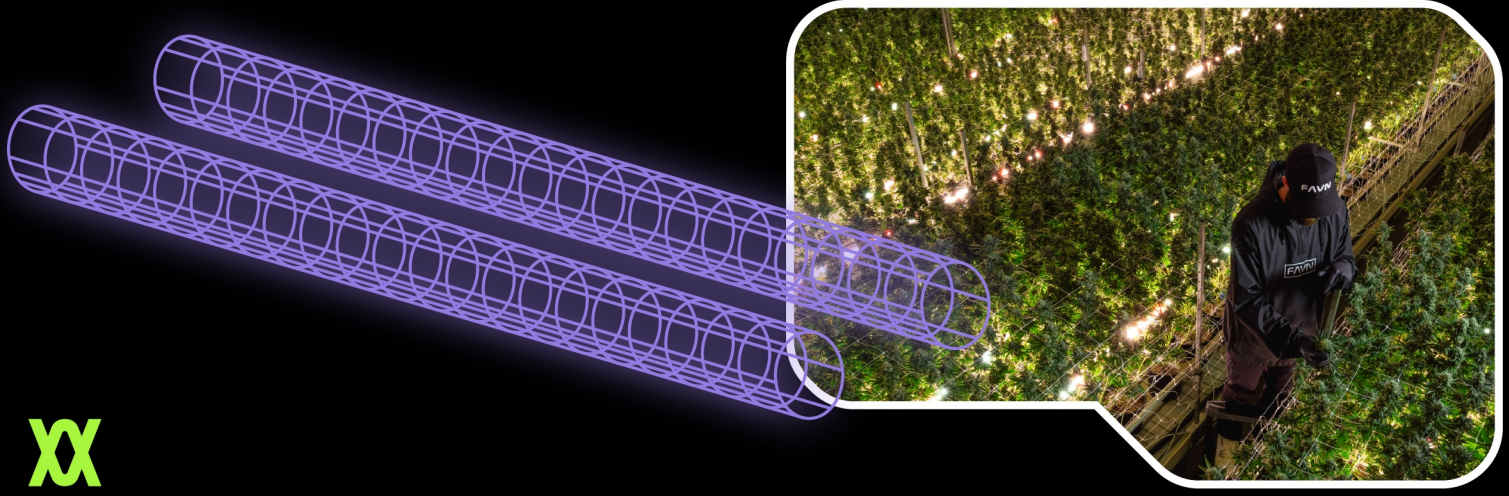

# TECHNICAL SPECIFICATIONS


| AMPS | DAISY-CHAIN MAX # CONNECTED | VOLTAGE |
|---|---|---|
| 1.0 | 9 | 120 |
| 0.5 | 17 | 240 |
| 0.43 | 20 | 277 |
| 0.25 | 35 | 480 |

Standard R Series fixtures operate at 120-277v; a 480v R8 is available upon request.





- 120W DIMMABLE LED FIXTURE
- 45.6" L X 2.9" W X 3.3" H
- IP66 RATING
- 5YR WARRANTY

## R6

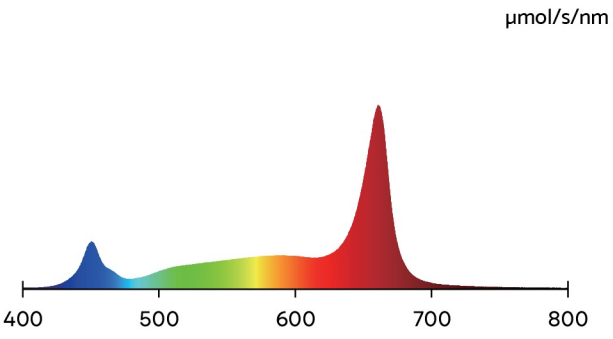


## R8

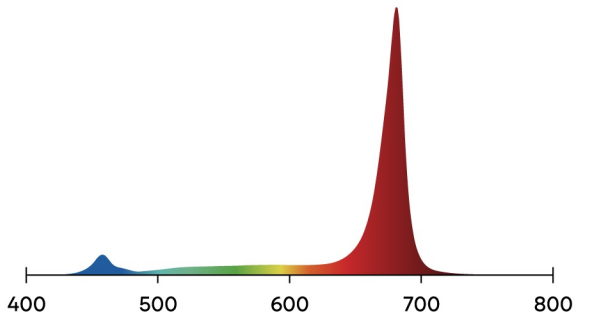



| | | |
|---|---|---|
| R6 | PPE (MOL/J) | up to 2.9 |
| | PPF (MOL/S) | up to 359 |
| R8 | PPE (MOL/J) | up to 3.28 |
| | PPF (MOL/S) | up to 399 |

| | |
|---|---|
| INPUT POWER | 120 W |
| INPUT VOLTAGE | 120V 240V 277V 480V |
| INPUT CURRENT | 1.0A 0.5A 0.43A 0.25A |
| FREQUENCY | 5-/60HZ |
| FIXTURE DIMENSIONS | 45.6"L x 2.9"W x 3.3"H<br>115.7cm x 7.5cm x 8.5cm |
| WEIGHT | 5.72LB / 2.6KG |
| THERMAL MANAGEMENT | PASSIVE |
| OPERATION TEMPERATURE | 95°F/35°C MAX |
| LIGHT DISTRIBUTION | 120° |
| DIMMING | 40% - 100% OFF |
| LIFETIME | >50000 HRS |




# STANDARD SET-UPS

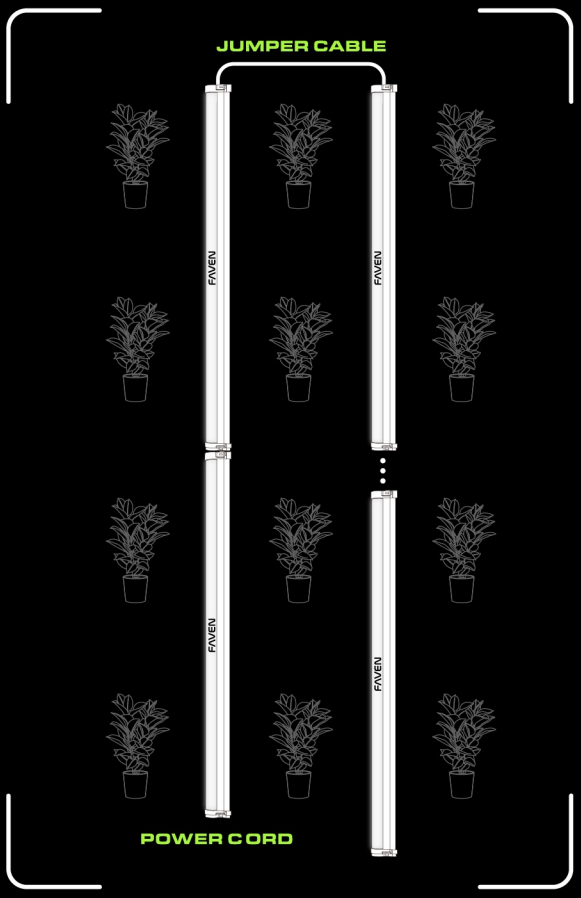


## LENGTHWISE

Running parallel with the bench length.

- Popular choice for first time users
- Suitable for most facilities

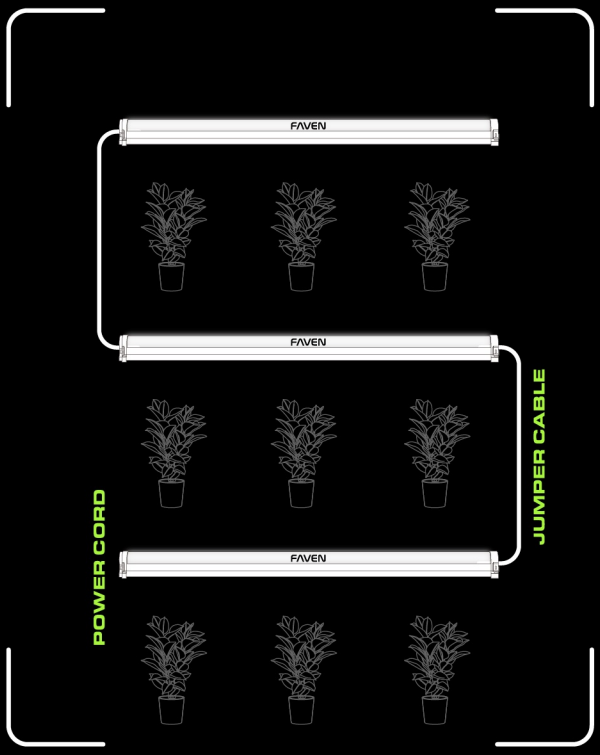



## WIDTHWISE

Cross-row orientation running perpendicular with the bench width.

- Improved access to the plants
- Improved canopy coverage

Intertek
4009588

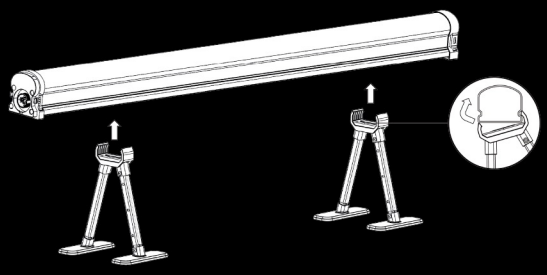

**ADJUSTABLE STANDS**
**8”, 10”, 12”**

**SALES AND INQUIRIES:**
sales@favenlighting.com

**TECHNICAL SUPPORT:**
support@favenlighting.com

**YOUTUBE + INSTAGRAM:**
@favenlighting

info@favenlighting.com favenlighting.com